

Foshan DongDian Era Lighting Co., Ltd reserves the right to change product design and planning without prior notice. The specific parameters are subject to the instructions; Recommended features are not all products, please pay attention to the product promoters or service hotline when purchasing.



**DD ERA LIGHTING**

**Foshan Dongdian Era Lighting Co.,LTD**

**Foshan DongDian Era Lighting Co., Ltd**

ADD:No.3,Xiangtianan Road,Dawo Village,Danzao  
Town,Nanhai District,Foshan Guangdong ,China  
TEL:+86-757-8540 3133  
FAX: +86-757-8180 6723  
E-mail:romeo@dd-era.com  
www.dd-eralighting.com

**2023**  
Catalogue

# ABOUT US

Foshan Dongdian Era Lighting Co., LTD is a manufacturer with 10 - years experiences in designing and supplying LED bulb , LED Downlight and flood light . Our factory located in Foshan , Guangdong , China , which has great advantage in transportation and manufacturing . Our factory covers an area of 20 , 000m<sup>2</sup> Excellent design and development team and strict QC department , as well as advanced equipment to ensure that we can complete orders on time . We work well together , and we are pride of ourselves have the ability to delivery products with the shortest lead time in the industry and the maintain high quality of our products .We warmly welcome your joining to make a bright future .



Our Factory have passed ISO 9001:2015 standard  
LED products have pass a lot of certification



Country	Mark
European Union	CE CB ErP
Germany	UL FC DLG
USA	UL FC DLG
Japan	PS E
Canada	UL FC
Brasil	UL FC
Philippine	PNS
China	CCC CQC

Country	Mark
Indonesia	SNI
Mexico	NOM
Russia	GOST EAC
Saudi Arabia	SASO
India	BIS
Korea	KCC
Thailand	TISI
Bengal	BIS



# T1 Series



### PERFORMANCE :

- Die-casting Aluminium body, Good heat dissipation
- Use high quality SMD2835 LED chip
- Use high quality LED driver
- long lifespan ,2years warranty
- High luminous efficiency, Low heat generation.
- No radiation safe for body.
- Environmental protection: 100% recyclable, no mercury or other hazardous materials.



### Product description:

Model	Wattage	Dimension (mm)	lm/w	Ra	Base	LED QTY	Pcs/Carton	Packing size (cm)	LED driver option	color temperature Option	Remark
T12001	20W	D80*H156	100	>80	E27	26	40	41.5*33.5*32.2	<input type="checkbox"/> NON-Isolated 170-265V PF>0.5 <input type="checkbox"/> NON-Isolated 85-265V PF>0.9 <input type="checkbox"/> Linear driver 200-240V PF>0.9 <input type="checkbox"/> DOB 170-265V PF>0.5 Driver on board	<input type="checkbox"/> 2800K-3200K <input type="checkbox"/> 4000K-4500K <input type="checkbox"/> 6000K-6500K <input type="checkbox"/> 7000K-8000K	
T13001	30W	D100*H185	100	>80	E27	40	40	53*42.5*42			
T14001	40W	D120*H200	100	>80	E27	52	25	63*63*24.8			
T15001	50W	D120*H200	100	>80	E27	69	25	63*63*24.8			
T16001	60W	D120*H210	100	>80	E27	81	15	63*38.5*25.8			
T18001	75W	D135*H245	100	>80	E40	96	8	56.5*28.5*29.8			
T11001	95W	D150*H263	100	>80	E40	120	8	63*32.3*30.3			
T112501	120W	D158*H270	100	>80	E40	189	8	66*33.5*31.4			
T115001	140W	D158*H286	100	>80	E40	240	6	49.8*33.5*33.3			



# UFO Series

## PERFORMANCE :

- Aluminium body, Good heat dissipation
- Use high quality SMD2835 LED chip
- Use high quality LED driver
- long lifespan ,2years warranty
- High luminous efficiency, Low heat generation.
- No radiation safe for body.
- Environmental protection: 100% recyclable, no mercury or other hazardous materials.



## Product description:

Model	Wattage	Dimension (mm)	lm/w	Ra	Base	LED QTY	PCS/ Carton	Packing size (cm)	LED driver option	color temperature Option	Remark
UFO3001	30W	D130*H145	90	>80	E27	36	24	51*45*26.8	<input type="checkbox"/> NON-Isolated 170-265V pf>0.5 <input type="checkbox"/> DOB 170-265V pf>0.5	<input type="checkbox"/> 2800K-3200K <input type="checkbox"/> 4000K-4500K <input type="checkbox"/> 6000K-6500K <input type="checkbox"/> 7000K-8000K	
UFO5001	50W	D150*H160	90	>80	E27	63	24	58.6*50.5*30.5			
UFO7001	70W	D170*H180	90	>80	E27	120	18	54.5*46.5*36.5			



# PT1 Series

## PERFORMANCE :

- PC cover with strong PBT body.
- Use high quality SMD2835 LED chip
- Use high quality LED driver
- long lifespan ,2yeas warranty
- High luminous efficiency, Low heat generation.
- No radiation safe for body.
- Environmental protection: 100% recyclable, no mercury or other hazardous materials.



## Product description:

Model	Wattage	Dimension (mm)	lm/w	Ra	Base	LED QTY	PCS/ Carton	Packing size (cm)	LED driver option	color temperature Option	Remark	
PT11501	15W	D70*H126	90	>80	E27	18	100	71.5*36.5*27.5	<input type="checkbox"/> NON-Isolated 170-265V pf>0.5 <input type="checkbox"/> DOB 170-265V pf>0.5 Driver on board	<input type="checkbox"/> 2800K-3200K <input type="checkbox"/> 4000K-4500K <input type="checkbox"/> 6000K-6500K <input type="checkbox"/> 7000K-8000K		
PT12001/S	18W	D80*H148	D80*H120	90	>80	E27	24	80 65.5*41.5*32.2			42.5*42.5*26	
PT13001/S	28W	D100*H172	D105*H145	90	>80	E27	36	51*51*38			55*48.5*18.5	
PT14001/S	38W	D115*H198	D115*H165	90	>80	E27	48	58.7*47*42.5			60*48.5*18.5	
PT15001/S	48W	D125*H225	D125*H175	90	>80	E27	63	64.5*39*48.5			52.5*40*19.5	
PT16001/S	58W	D135*H241	D137*H195	90	>80	E27	75	69.2*55.5*27			57.3*43.6*21.5	



# PT2 Series

### PERFORMANCE :

- PC cover with strong PBT body.
- Use high quality SMD2835 LED chip
- Use high quality LED driver
- long lifespan ,2yeas warranty
- High luminous efficiency, Low heat generation.
- No radiation safe for body.
- Environmental protection: 100% recyclable, no mercury or other hazardous materials.



### Product description:

Model	Wattage	Dimension (mm)	lm/w	Ra	Base	LED.QTY	PCS/Carlton	Packing size (cm)	LED driver option	color temperature Option	Remark
PT22001	15w	D70*H130	90	>80	E27	12	50	36.5*36.5*27	<input type="checkbox"/> NON-Isolated 170-265V pf>0.5 <input type="checkbox"/> DOB 170-265V pf>0.5 Driver on board	<input type="checkbox"/> 2800K-3200K	
PT22001	20w	D80*H148	90	>80	E27	15	40	41.5*33.5*32.2		<input type="checkbox"/> 4000K-4500K	
PT23001	30w	D100*H178	90	>80	E27	24	40	53*42.5*42		<input type="checkbox"/> 6000K-6500K	
PT24001	40w	D120*H211	90	>80	E27	32	15	63*38.5*25.8		<input type="checkbox"/> 7000K-8000K	
PT25001	50w	D135*H235	90	>80	E27	38	8	56.5*28.5*29.8			



# FL1 Series



### PERFORMANCE :


- Die-casting Aluminium body, Good heat dissipation
- Use high quality SMD2835 LED chip
- Use high quality LED driver
- long lifespan ,2years warranty
- High luminous efficiency, Low heat generation.
- No radiation safe for body.
- Environmental protection: 100% recyclable, no mercury or other hazardous materials.




### Product description:

Model	Wattage	Dimension (mm)	IP	lm/w	Ra	Weight (g)	PCS/Carton	Packing size (cm)	LED driver option	color temperature Option	Remark
FL13001	30W	141*110.8*27	IP66	100	80	460	30	44.5*34*19	<input type="checkbox"/> Linear driver 200-240V PF>0.9 <input type="checkbox"/> NON-Isolated 170-265V pf>0.5	<input type="checkbox"/> 2800K-3200K <input type="checkbox"/> 4000K-4500K <input type="checkbox"/> 6000K-6500K <input type="checkbox"/> 7000K-8000K	
FL15001	50W	207*145*25	IP66	100	80	770	20	48.5*33*20			
FL110001	100W	276*205*31	IP66	100	80	1565	10	39*32*26			
FL115001	150W	315*235*35	IP66	100	80	2380	5	43.5*38.5*30			
FL120001	200W	372*282*41	IP66	100	80	3560	4	45.5*40*35.5			
FL130001	300W	460*339*44	IP66	100	80	4550	4	48.3*21.6*36.2			
FL140001	400W	500*400*70	IP66	100	80	6500	4	52*30*42			



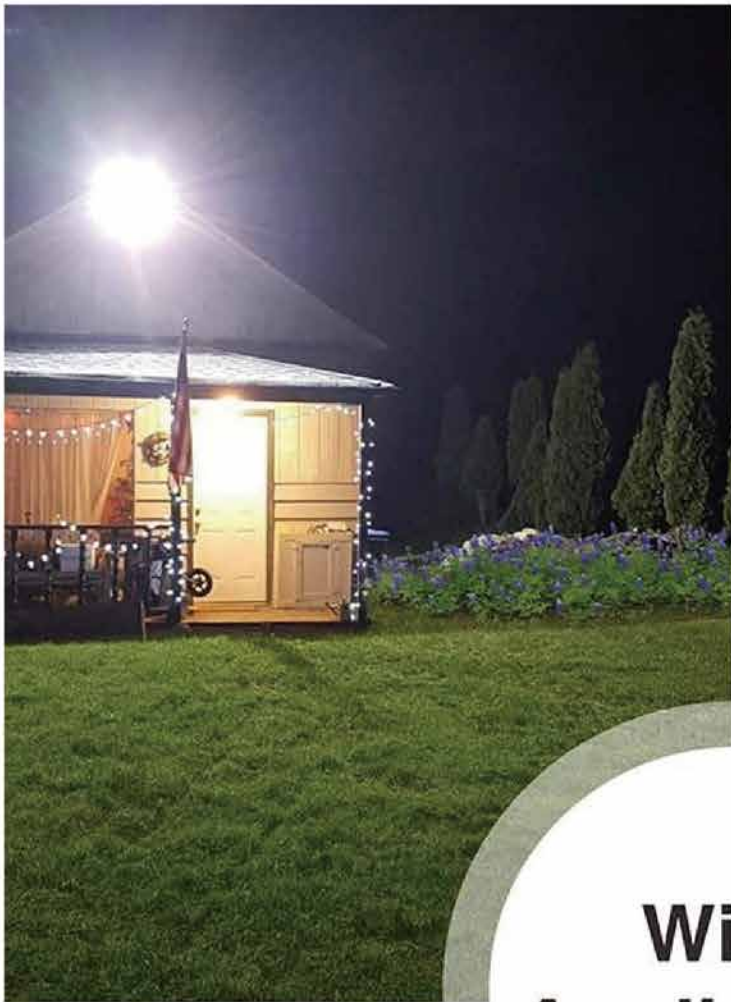

**Wide  
Application**

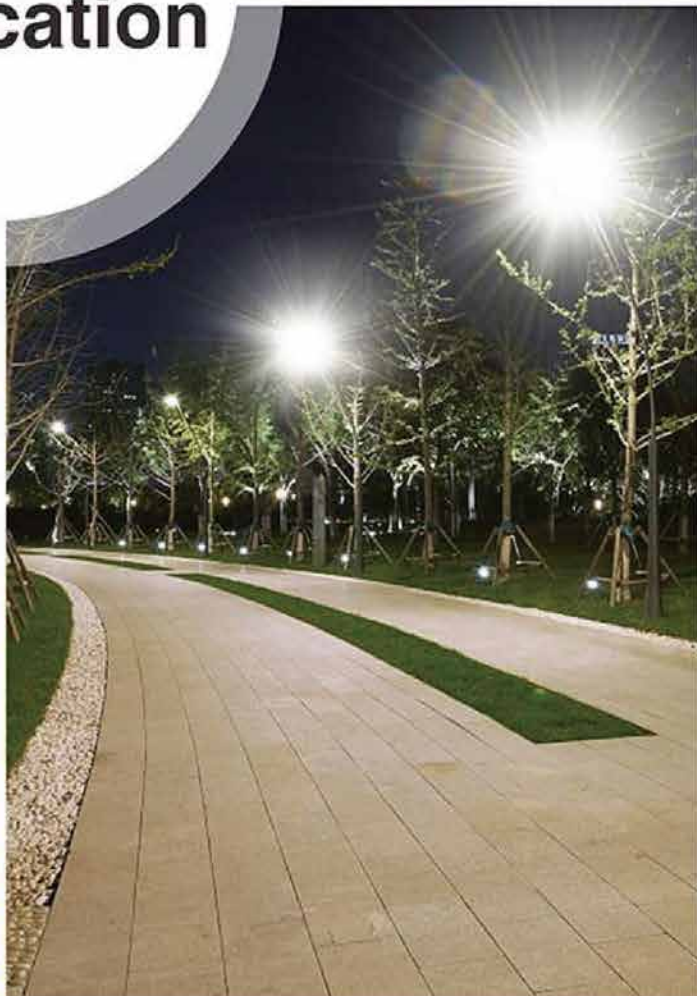




# FL2 Series



## ULTRA THIN REFLECTOR LED

### FL2-Lens

- Less volume 50% less space and cost than the original product
- Lower transportation costs
- Made of high imported chips, high brightness, low heat, low energy consumption and long service life

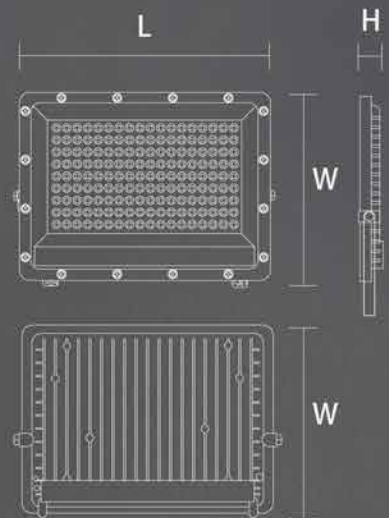

P	Size	Color box size	Outer box size	Packing quantity	Material
50W	234*178*24	225*165*32	350*340*245	20	Aluminum+PC
100W	282*222*24	285*215*32	450*340*305	20	Aluminum+PC
200W	383*295*26	370*280*35	390*370*300	10	Aluminum+PC
300W	433*340*31.5	420*320*38	440*400*340	10	Aluminum+PC

170/265V | CE | CRI>80 | | | CCT:3000K/4000K/6500K


# FL2 Series



## ULTRA THIN REFLECTOR LED

### FL2-Glass

- Less volume 50% less space and cost than the original product
- Lower transportation costs
- Made of high imported chips, high brightness, low heat, low energy consumption and long service life

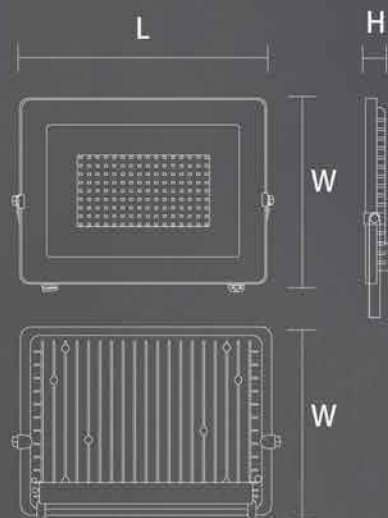

P	Size	Color box size	Outer box size	Packing quantity	Material
50W	215*155*22	234*178*22	350*340*245	20	Aluminum+Glass
100W	270*205*22	282*222*22	450*340*305	20	Aluminum+Glass
200W	360*270*24	383*295*24	390*370*300	10	Aluminum+Glass
300W	410*310*28	433*340*29.5	440*400*340	10	Aluminum+Glass

| 170-265V | | CRI>80 | | | CCT:3000K/4000K/6500K



Linear light Series



Free connecting

## LED LINEAR LIGHT

- Anti-glare frosted lampshade
- High light transmittance
- Ensure the height while soft light is not dazzling



	P	Size	PF	Lm/w	Material
Linear Light-20W	20W	600*50*55mm	>0.9	>120	Aluminum+PC
Linear Light-30W	30W	900*50*55mm	>0.9	>120	Aluminum+PC
Linear Light-40W	40W	1200*50*55mm	>0.9	>120	Aluminum+PC
Linear Light-50W	50W	1500*50*55mm	>0.9	>120	Aluminum+PC
Linear Light-68W	68W	2000*50*55mm	>0.9	>120	Aluminum+PC



### NO SCREW CONNECTION

Seamless Stitching  
Sturdy And Durable

# 1000W


## ONE-TIME CONCATENATION

Free Splicing  
Easy Installation



### FANGTONG ASSEMBLY KIT

- Hanging board\*2
- 5\*80 machine line\*2
- M5\*5 flange female\*6



### EXPOSED ACCESSORY PACKAGE

- Board\*2
- Screw bag\*1



### HOISTING KIT

- Rally head\*2
- 1.5m steel cable lagging\*2
- 7\*15M4\*2
- 60 cover \*2
- Screw accessories package\*1



## Linear light Series



### X Shaped Connection-12W

P: 12W  
 Size: 181\*181\*58mm  
 PF: >0.9  
 Lm/w: >100  
 CRI: >80  
 Material: Plastic+PC  
 CCT:3000K/4000K/6500K



170  
265V



IP20



### CROSS CONNECTION ACCESSORIES

- 4 copper locks\*1
- Rally head\*1
- 1.5m steel cable lagging\*1
- 0.5m steel cable headed on both sides +7\*15M4\*4
- 60 cover \*1
- Screw accessories package\*1
- Hanging board\*4



### T Shaped Connection-10W

P: 10W  
 Size: 181\*116.5\*58mm  
 PF: >0.9  
 Lm/w: >100  
 CRI: >80  
 Material: Plastic+PC  
 CCT:3000K/4000K/6500K



170  
265V



IP20



### T-JOINT ACCESSORIES

- 2 copper locks\*1
- Rally head\*1
- 1.5m steel cable lagging\*1
- 0.5m steel cable headed on both sides +7\*15M4\*2
- 60 cover \*1
- Screw accessories package\*1
- Hanging board\*2

## Linear light Series



### L Shaped Connection-8W

P: 8W  
 Size: 116.5\*116.5\*58mm  
 PF: >0.9  
 Lm/w: >100  
 CRI: >80  
 Material: Plastic+PC  
 CCT:3000K/4000K/6500K

170  
265V

IP 20



### L-JOINT ACCESSORIES

- 2 copper locks\*1
- 2Rally head\*1
- 21.5m steel cable lagging\*1
- 20.5m steel cable headed on both sides +7\*15M4\*2
- 260 cover \*1
- 2Screw accessories package\*1
- 2Hanging board\*2

## MULTIPLE WIRE PLUG



XT1 three-wire PC plug, 18AWG over UL,  
 wire length 30cm, outer strip 40mm, inner strip 10mm,  
 ground wire is yellow-green, in line with ROHS



XT1 three-wire PC plug, 18AWG over UL,  
 wire length 150cm, outer strip 40mm, inner strip 10mm,  
 ground wire is yellow-green, in line with ROHS



XT1 three-wire PC double plug,  
 18AWG over UL, wire length 200cm,  
 the ground wire is yellow-green, in line with ROHS