



iCSee user manual @ Android & IOS



JF TECH



01

About iCSee

02

Registration and Login

03

Add device

04

Live video



01

About iCSee





JF TECH

01

About iCSee



This is the initial interface of iCSee

What kind of software is it?
What does iCSee can do?



Construction of family memory changes in family life



Don't worry. This manual will
Introduce how to use this app.

iCSee is a software about network monitoring, which can login by cloud or local wifi, and specially developed for some monitoring devices (Fish-eye light bulbs, Smart video doorbell etc.)

Function Introduction



- Can use mobile phones view real-time video through WIFI and GPRS
- Support fish-eye devices mode switch
- Support LAN automatic search, quick-set configuration, serial number and QR code scanning etc. to add device
- Support remote playback and download video
- Support to capture and view the live view
- Support for live video recording and viewing
- Support alarm function

02

Registration and Login

02

Registration and Login

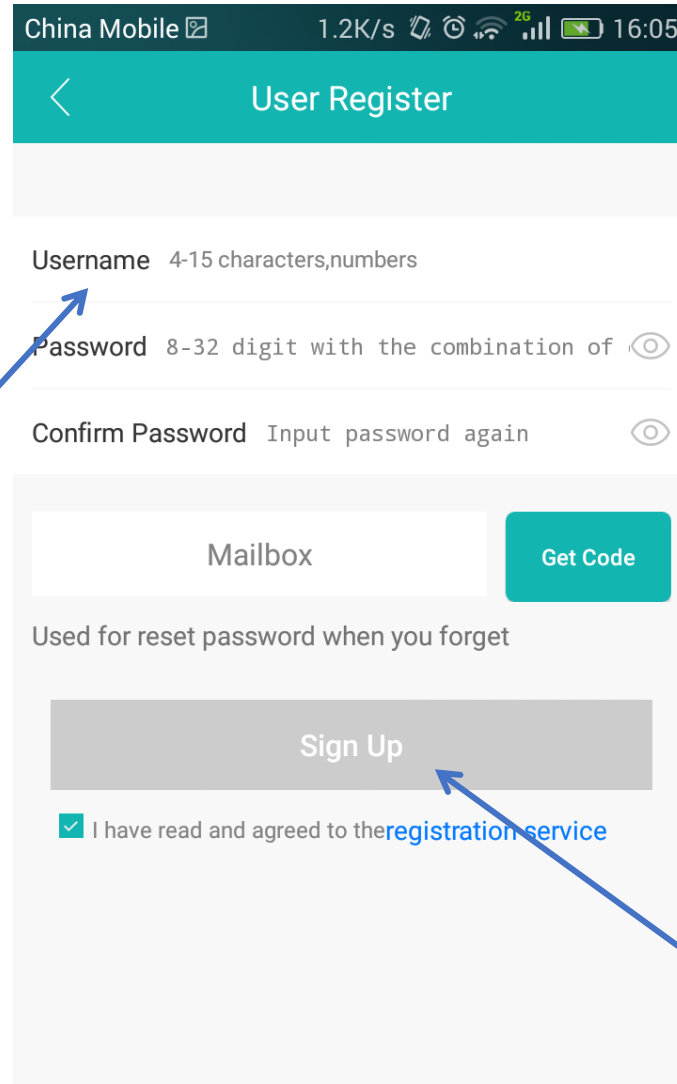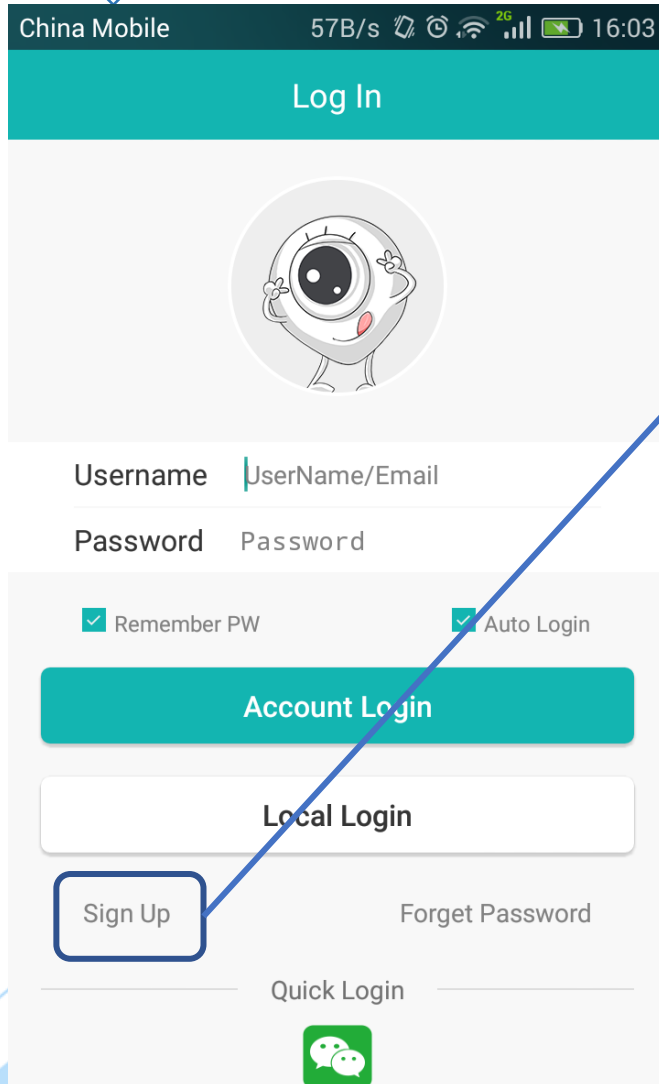

Register user


Username is composed of at least 2 combinations of Chinese, uppercase / lowercase letters, numbers and underline, or only Chinese, only letters, with a length of 4-15 bits.

Note: Usernames distinguish between uppercase and lowercase letters.

Password contains 8-32 characters and must include letters and numbers.

Use China phone number or e-mail to get register code or get password when you forget it.

When you fill the above information accurately, click the **“Sign Up”** button.

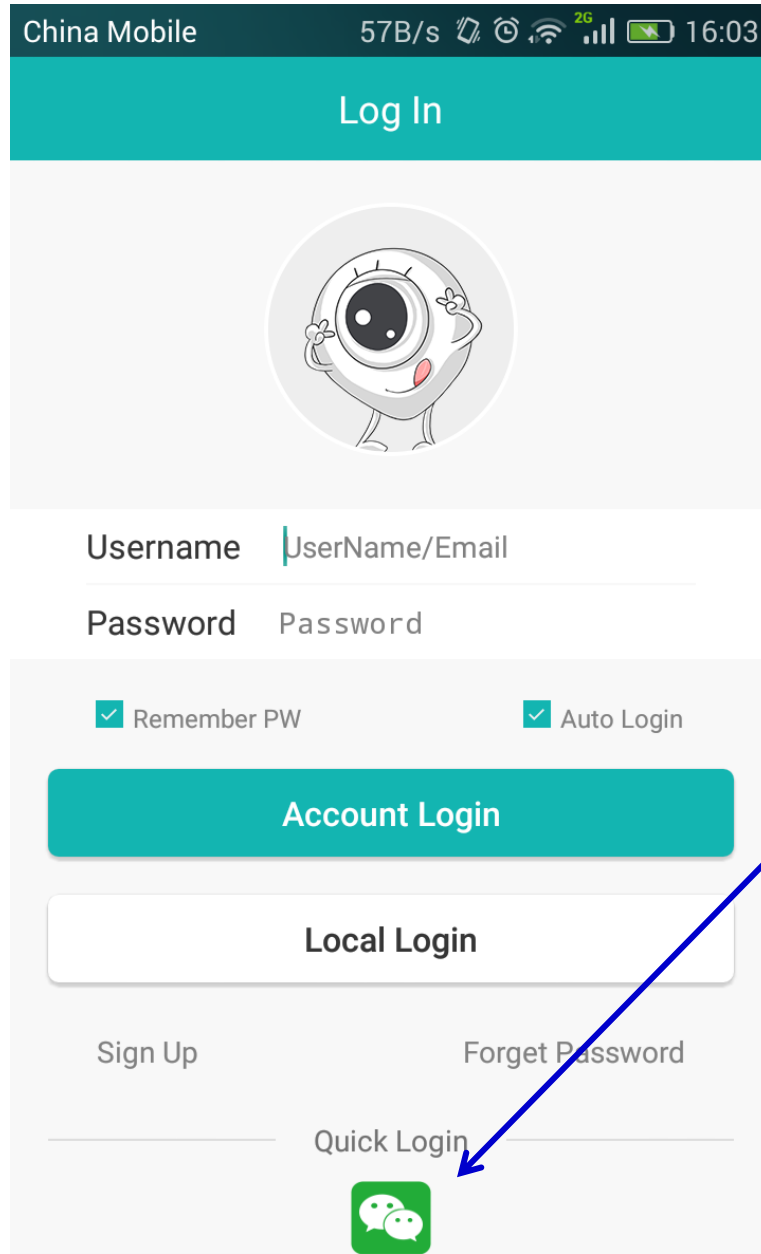

You can also choose **WeChat** logo to Quick Login

Username and Password

In this place, you can enter your username and password separately.

Enter your Username

Enter your Password

Account Login

You can log in with your username and password before connecting the camera. If you are using it for the first time, you have to register firstly.

China Mobile 57B/s 2G 16:03

Log In

Username UserName/Email

Password Password

Remember PW Auto Login

Account Login

Local Login

Sign Up Forget Password

Quick Login



Remember Password and Auto Login

The next time you log in, the password entry process will be omitted and you will be automatically logged in.

Local Login

This is a guest mode, usually just for temporary use.

Note: This way do not support Alarm and Message push Function.

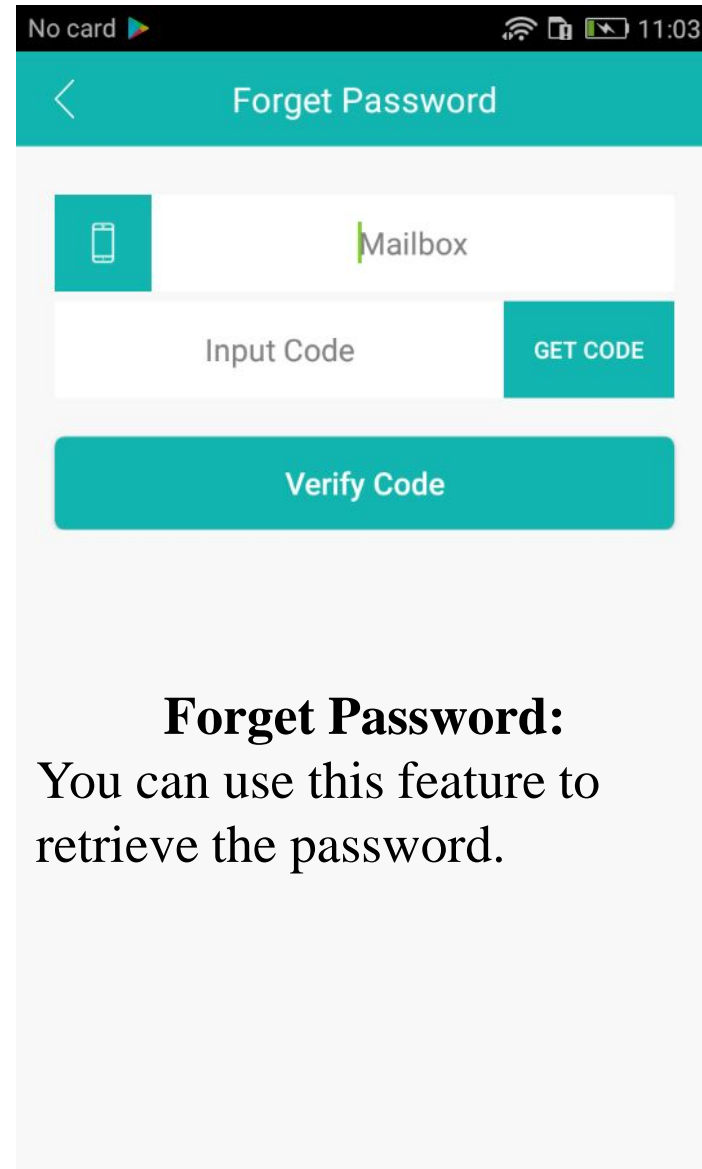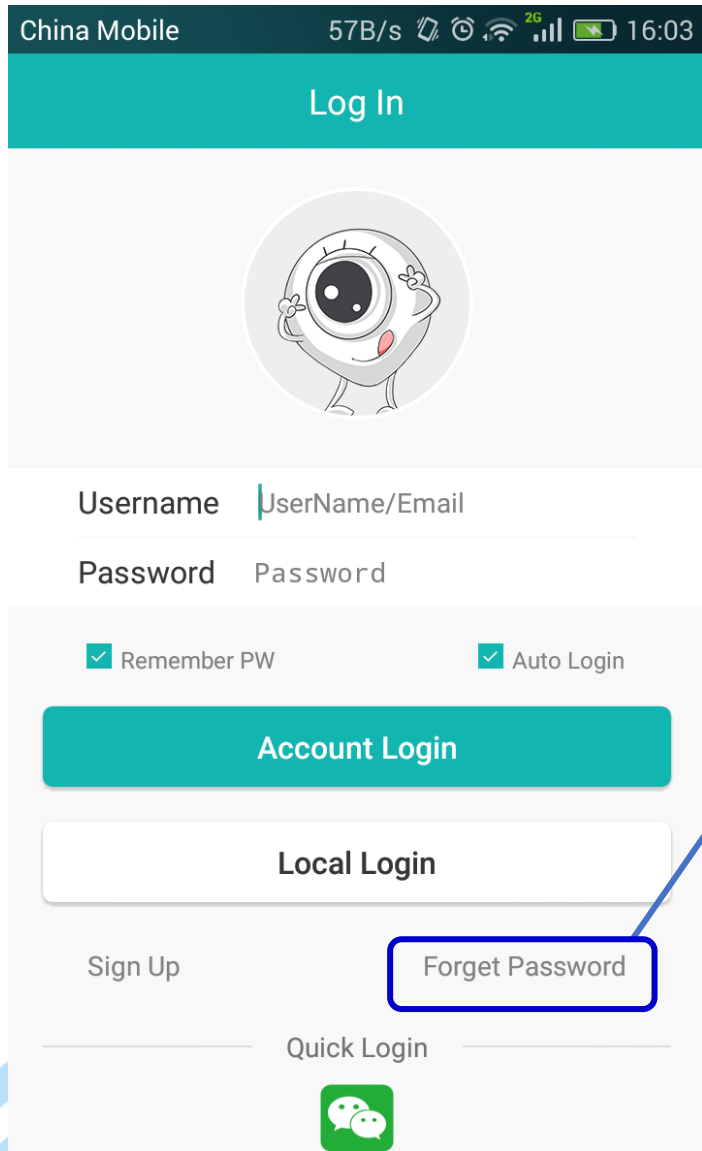



03

Add device

03

Add device

When you are logging in, click the **plus sign** in the upper right corner. The options shown in the figure will appear.

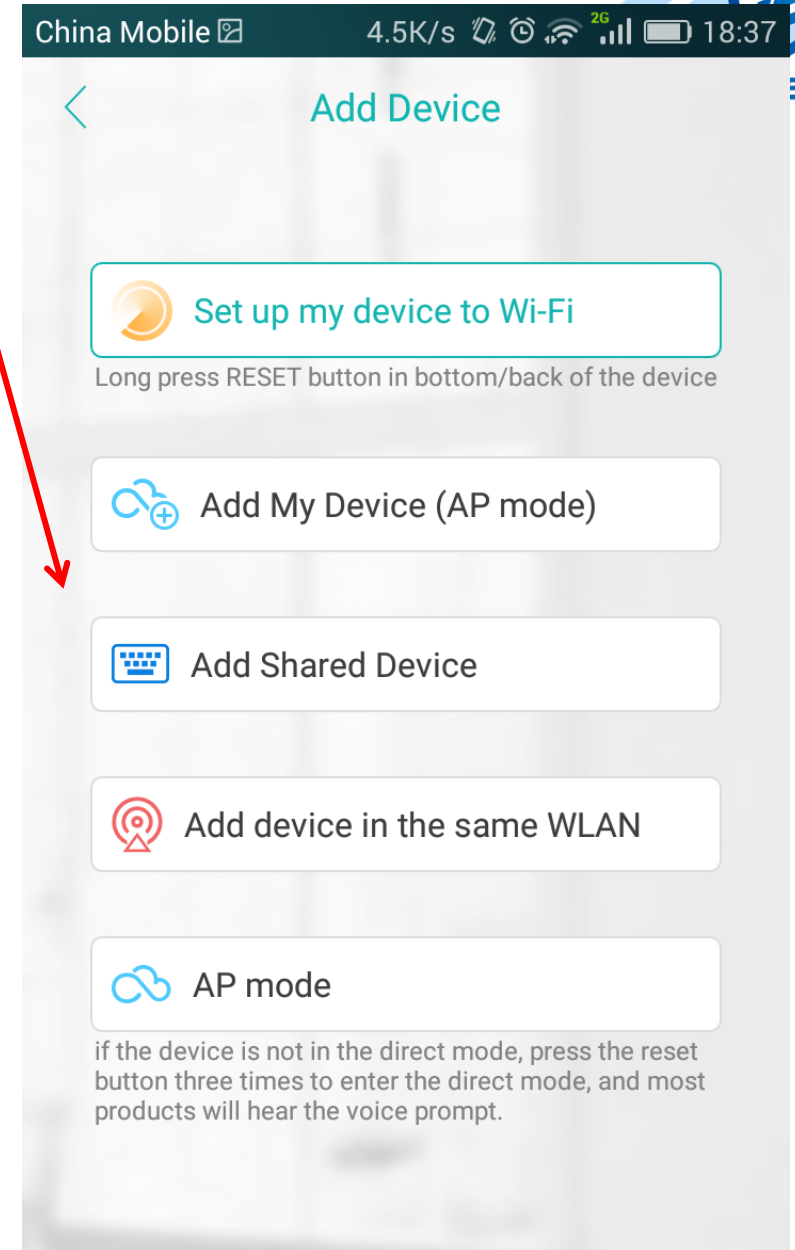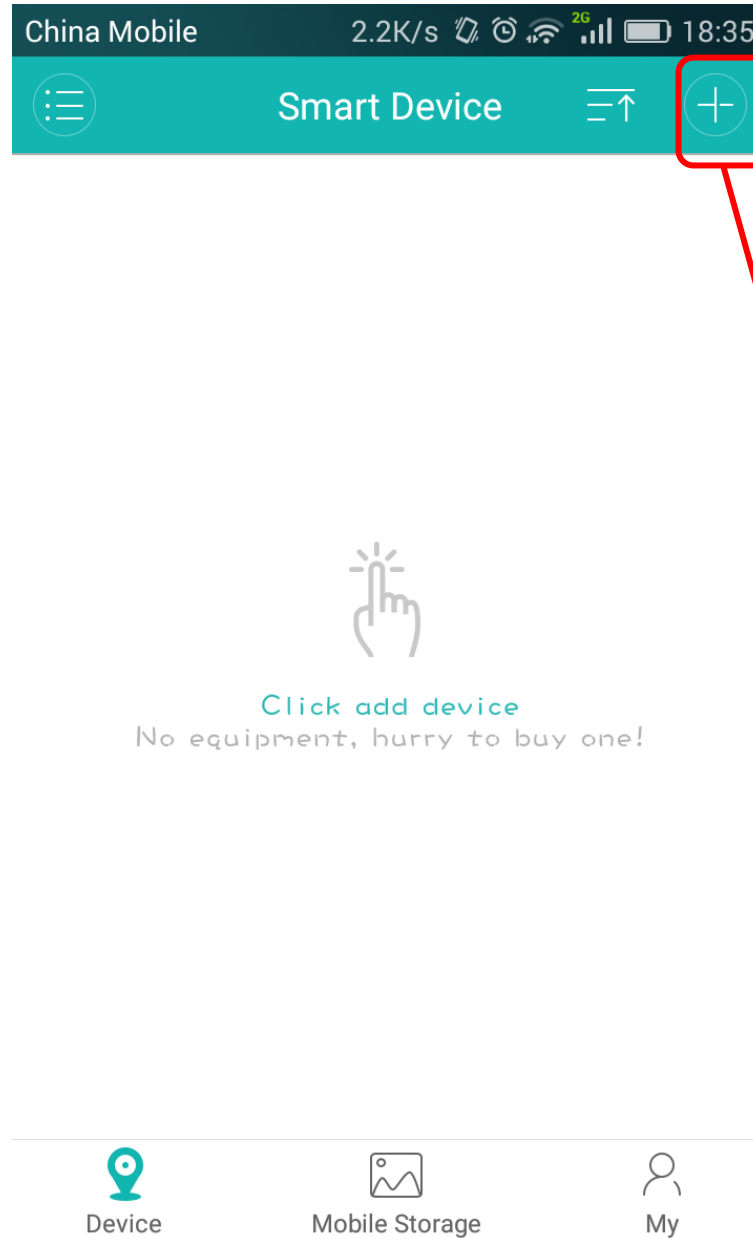


Add Device

 Set up my device to Wi-Fi

Long press RESET button in bottom/back of the device

 Add My Device (AP mode)

 Add Shared Device

 Add device in the same WLAN

 AP mode

if the device is not in the direct mode, press the reset button three times to enter the direct mode, and most products will hear the voice prompt.

Quickly connect the camera to the router

Use the AP to quickly connect the camera to the router

Add the device by serial number or by scanning the QR code



Add the device in the same router with your phone network



Cameras can view real-time video and video without connecting to an external network

1. Set up my device to Wi-Fi

Take **PTZ Camera** as an example to demonstrate how to add a device.

Click on the “**Set up my device to Wi-Fi**”.

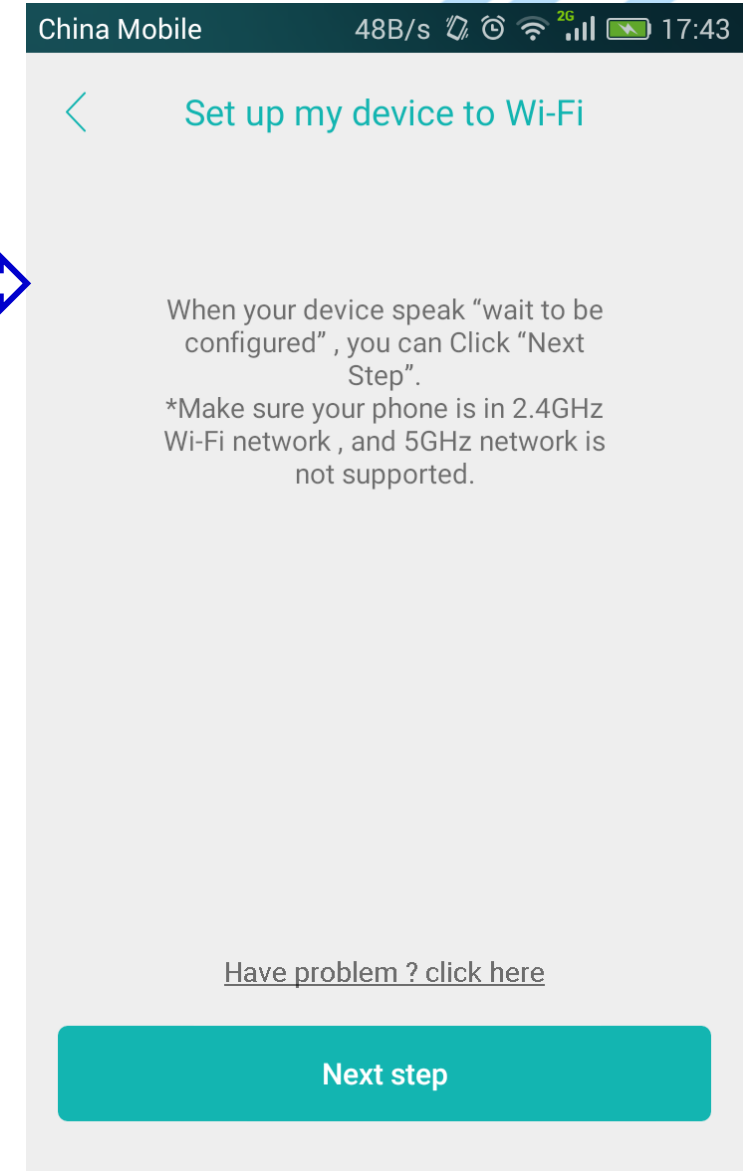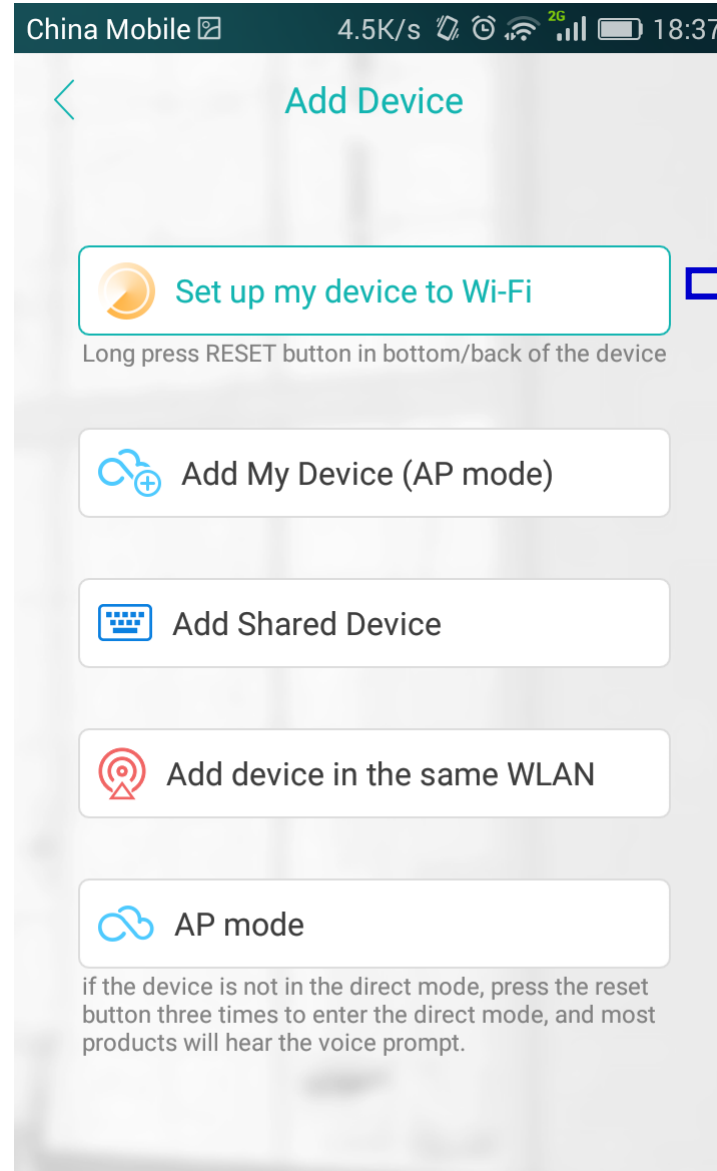

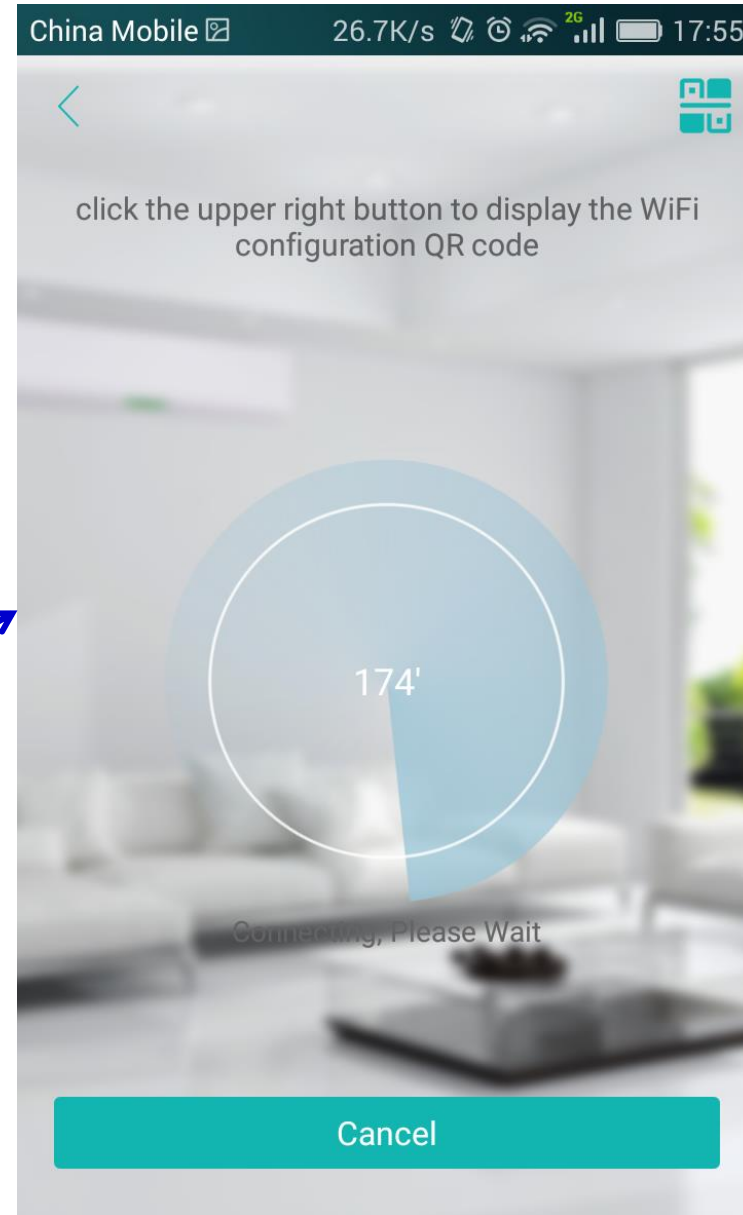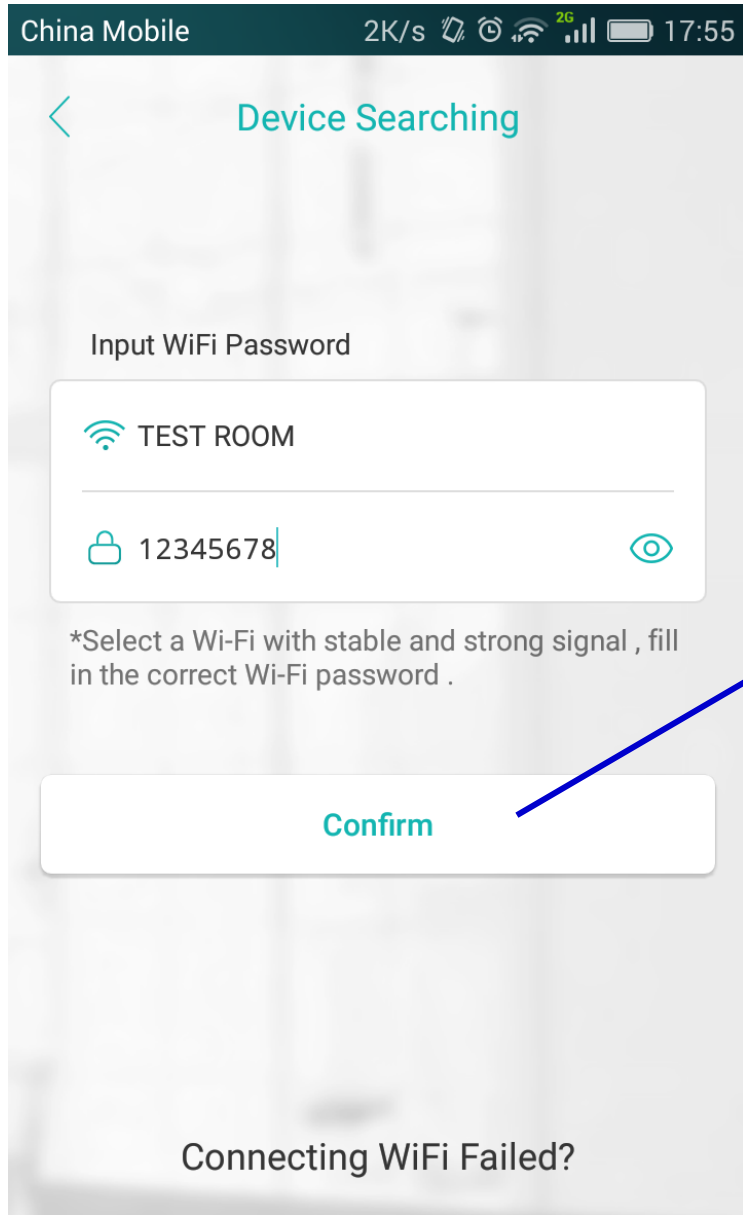

Successfully connected device



After the device is connected successfully, the password setting interface appears, as shown in the right figure.

Set New Password




At this point, you need to set up a new password and confirm the new password

Setup a name



After setting the password, you need to give your device a name.

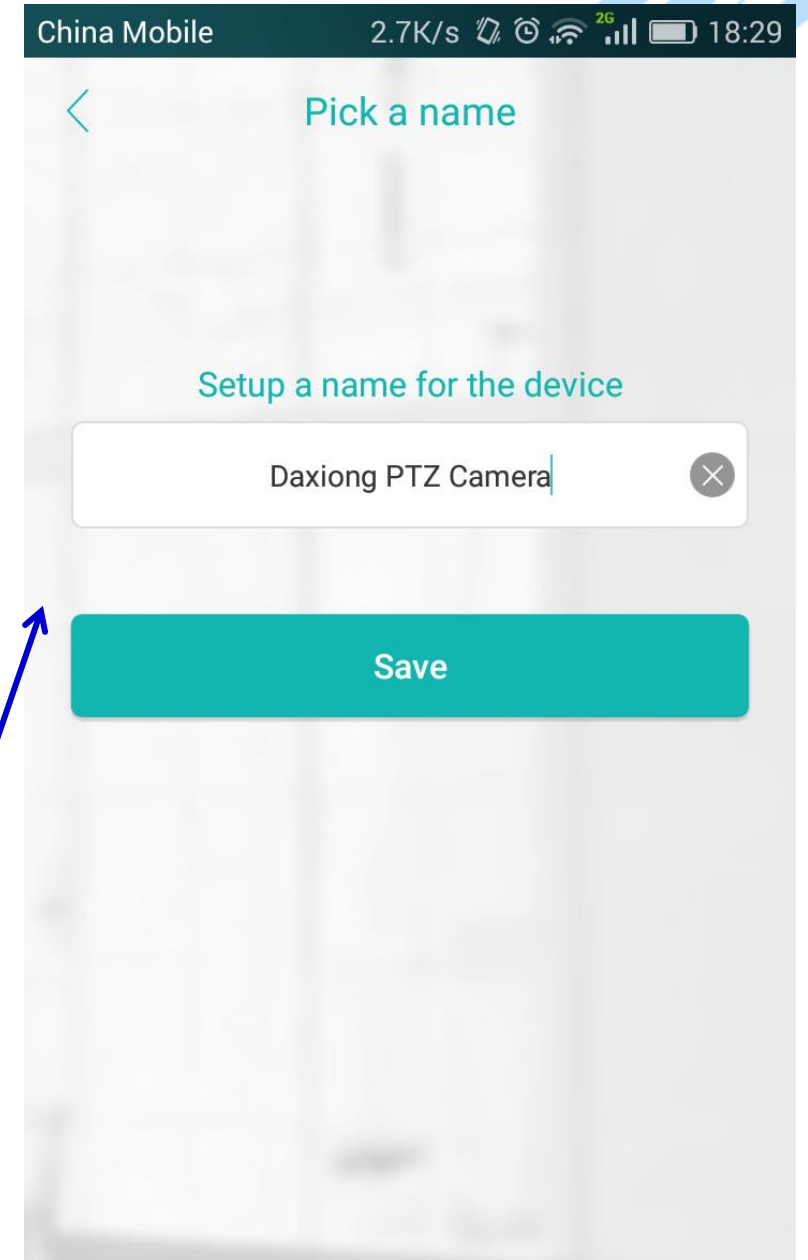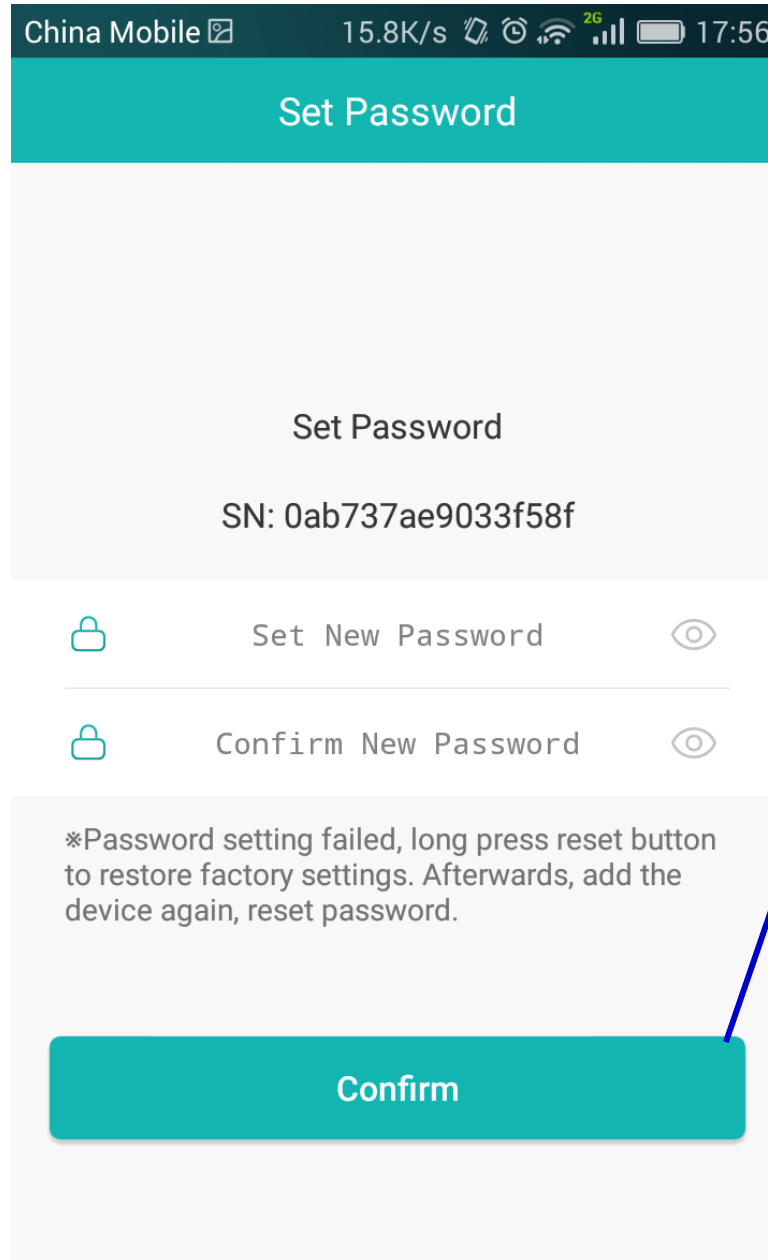

2. Add My Device (AP)

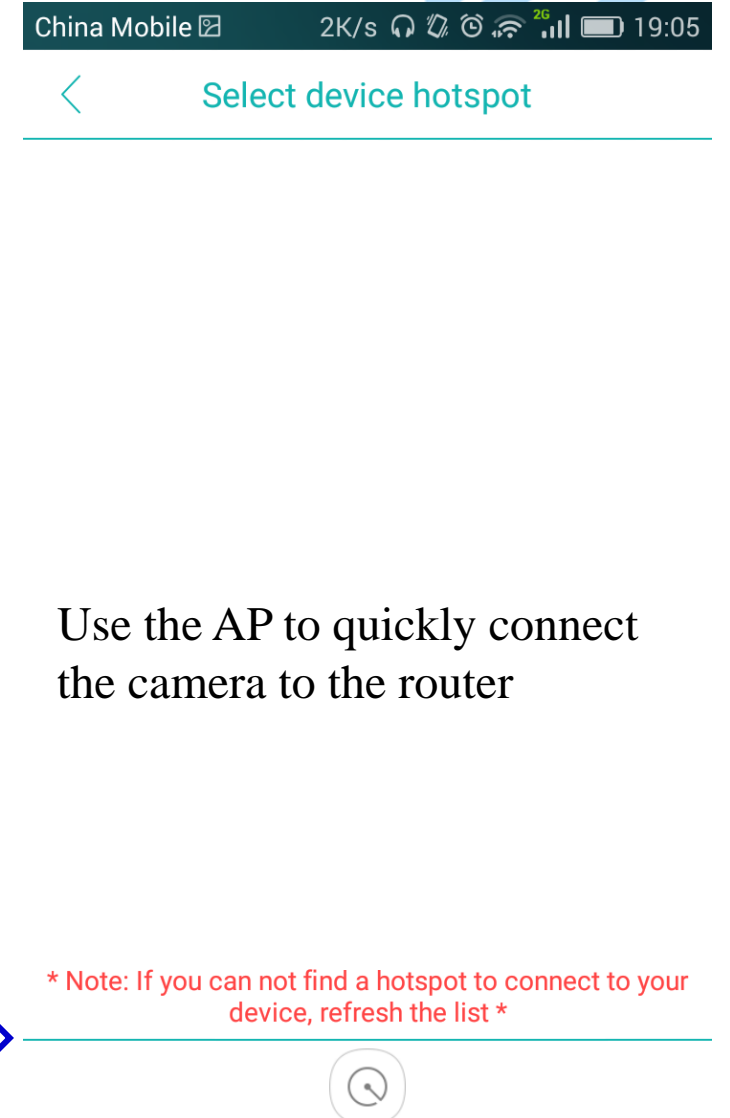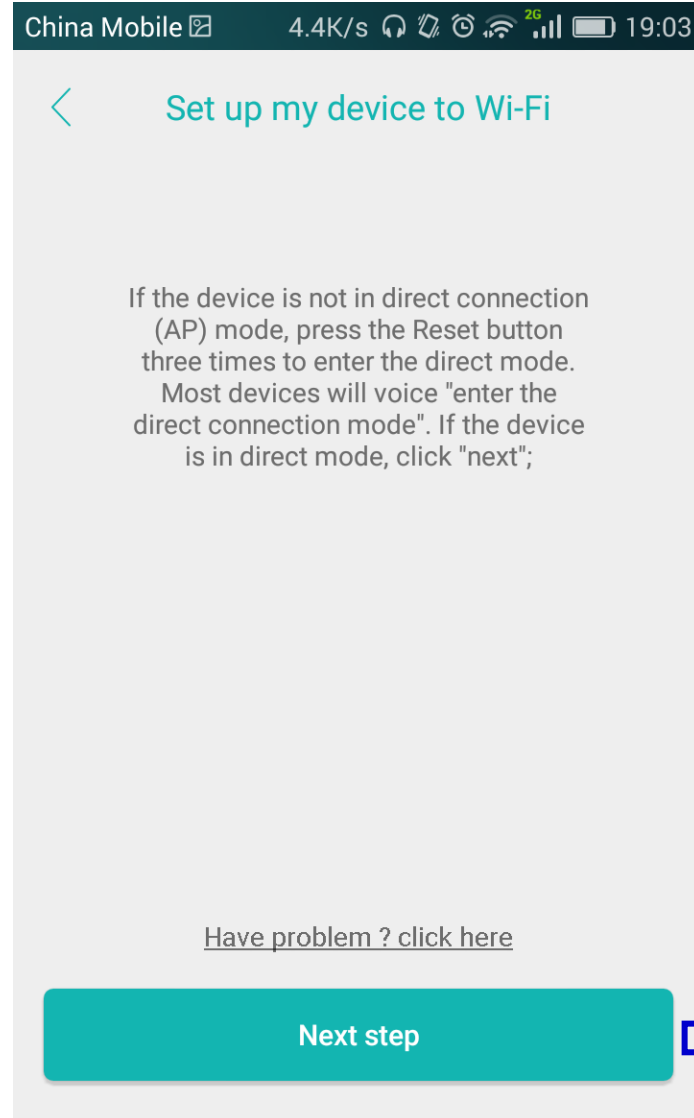
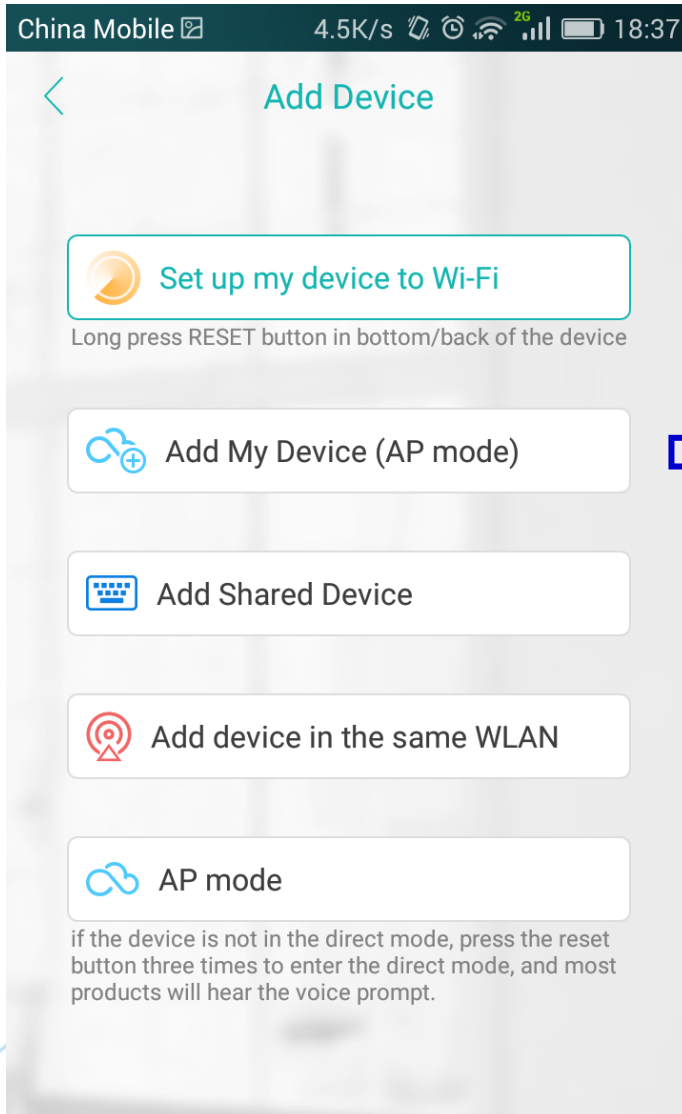


3. Add Shared Device

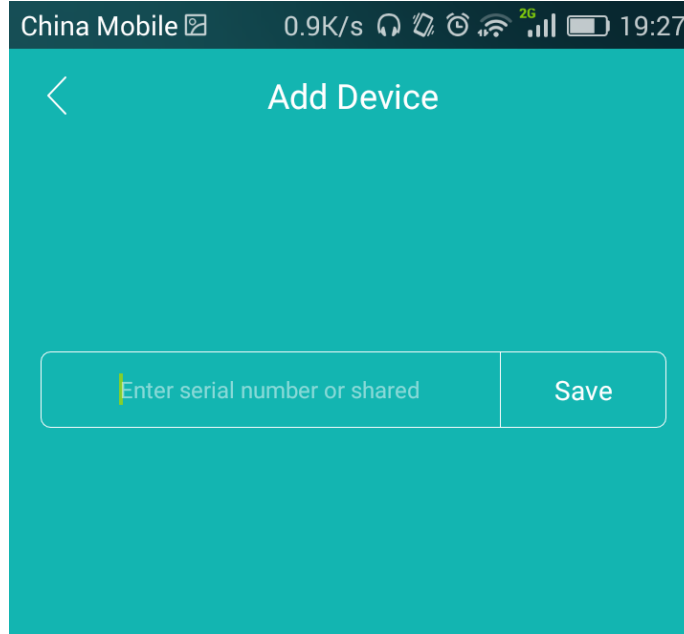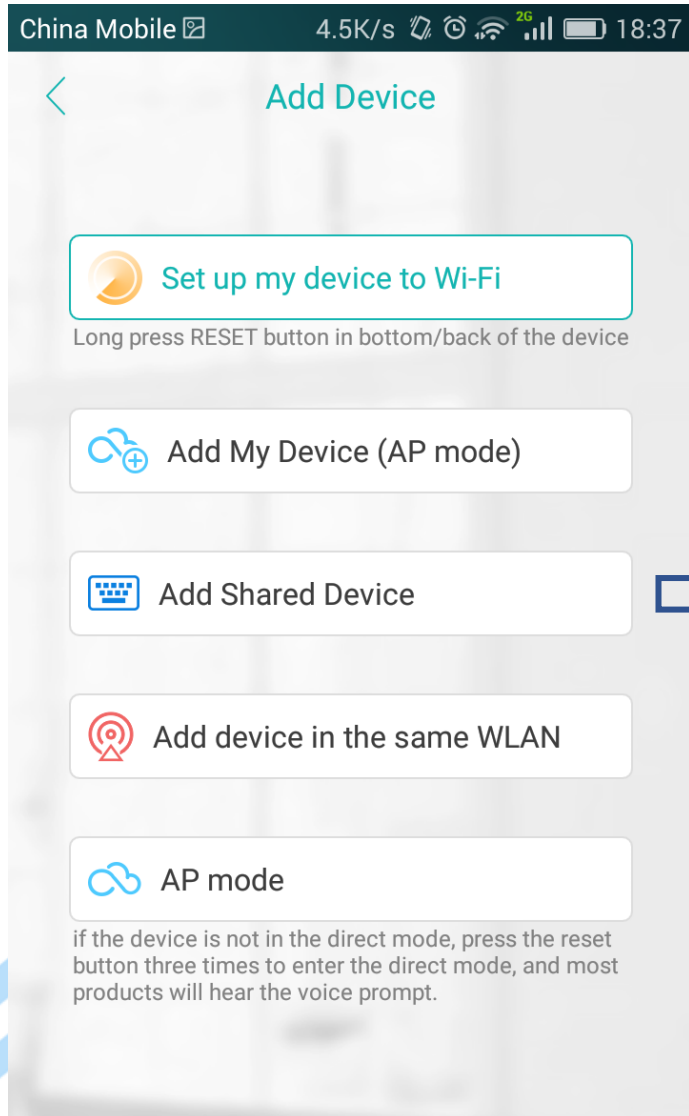


You can add the device use the serial number or shared or you can scan the device QR Code to add the device.

4. Add device in the same WLAN

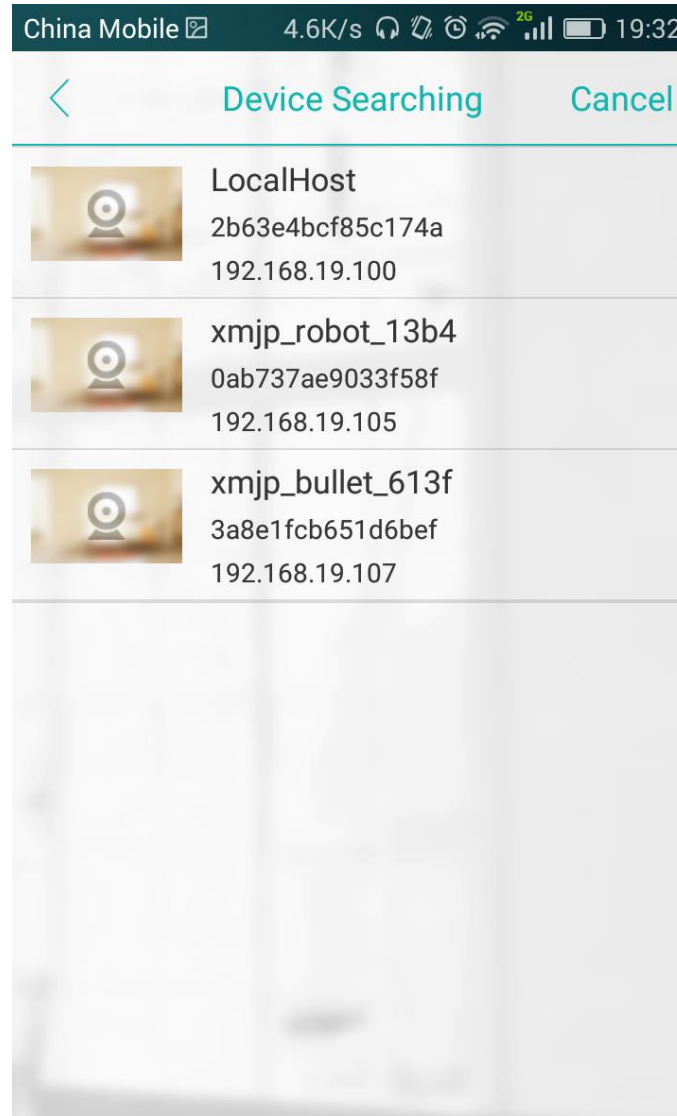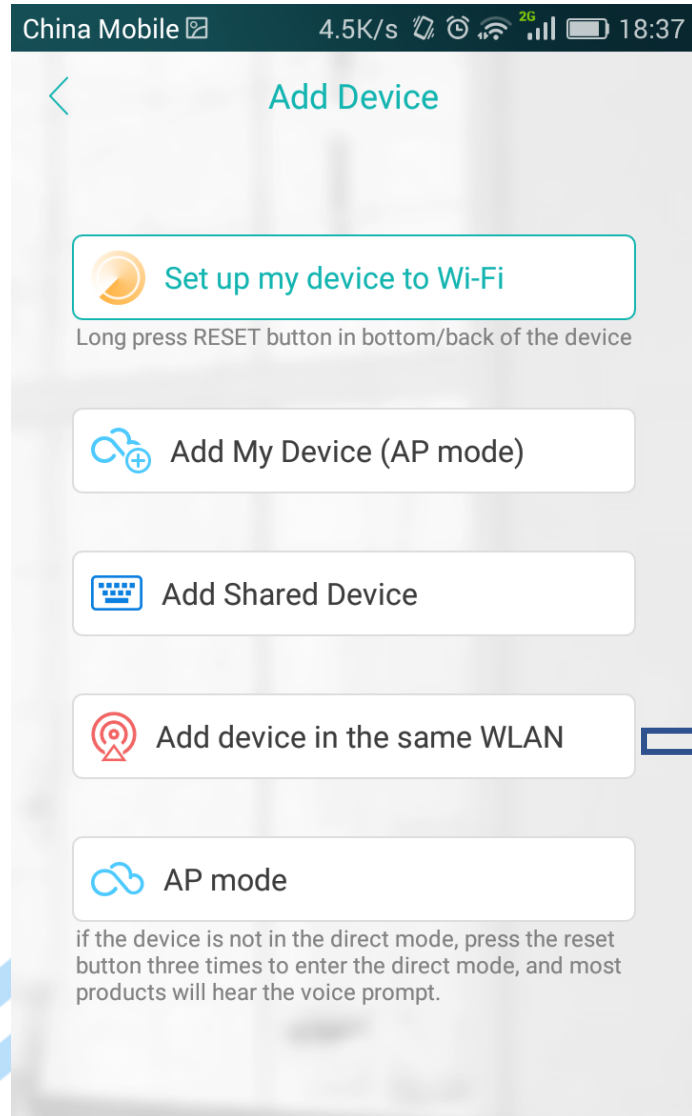

You can add the device which under the same WLAN.

5. AP mode

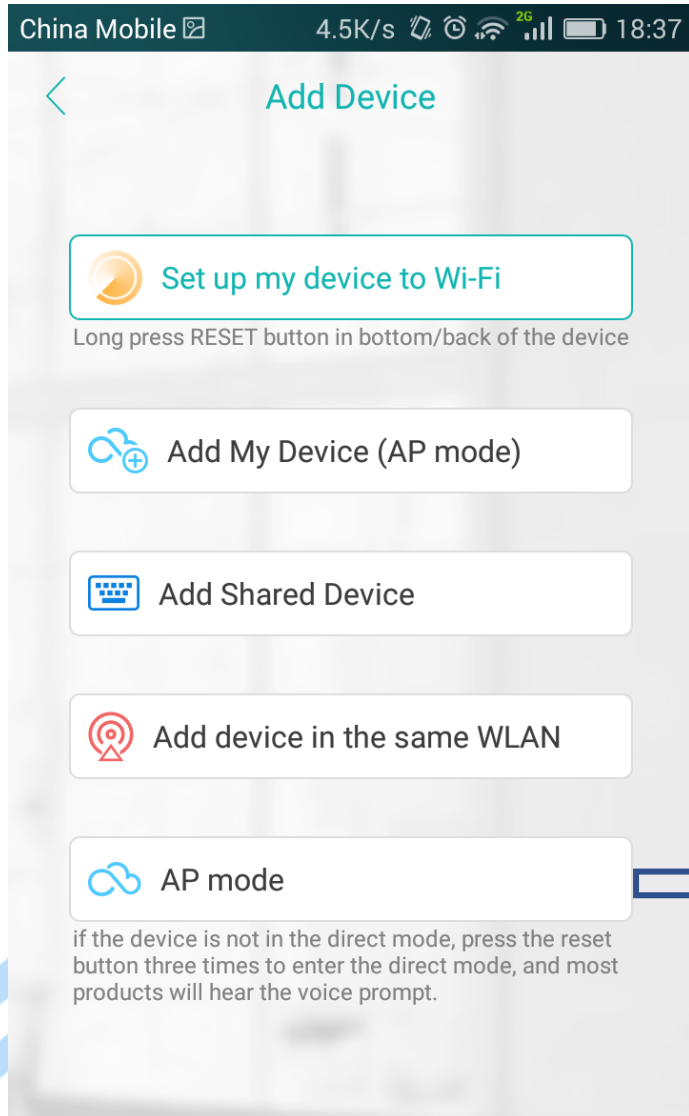

Your camera can view real-time video and video without connecting to an external network.



04

Add device



JF TECH

04

Live Video

Delete or wake Device


Long-press this thumbnail, you can delete the device;
Click this thumbnail, you can wake the device.

Mobile Storage

Here you can check the snapshot pictures and records.

Device


Then you can find the device you just added.

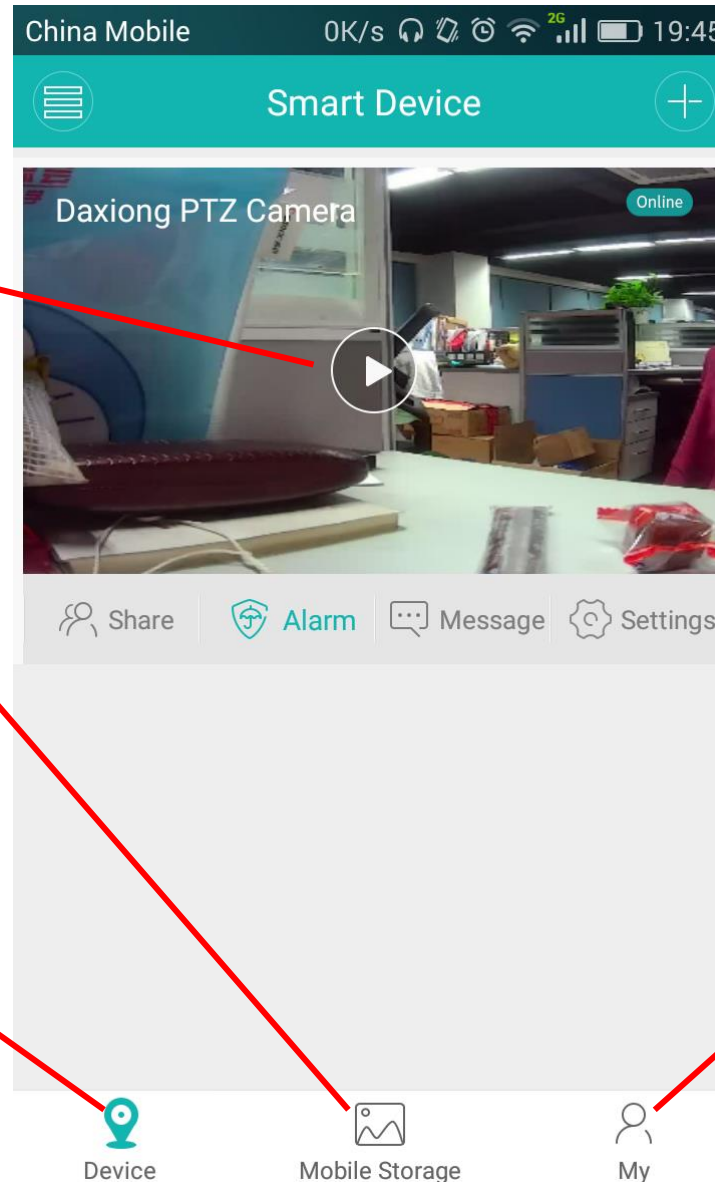


Settings


You can set alarm options, change passwords, check device information, etc.

My
Set and logout



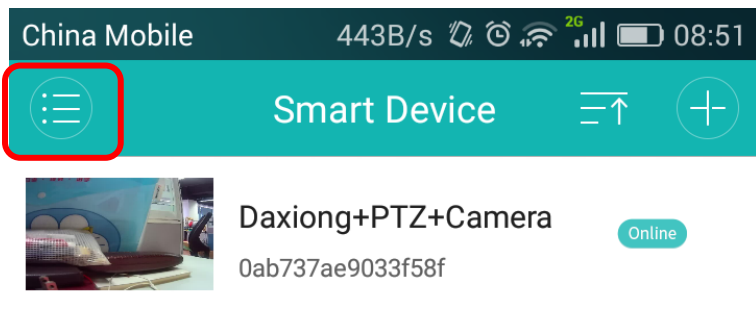



You could also click this icon to switch the style of displaying (In this display, you can see the serial number of the device).

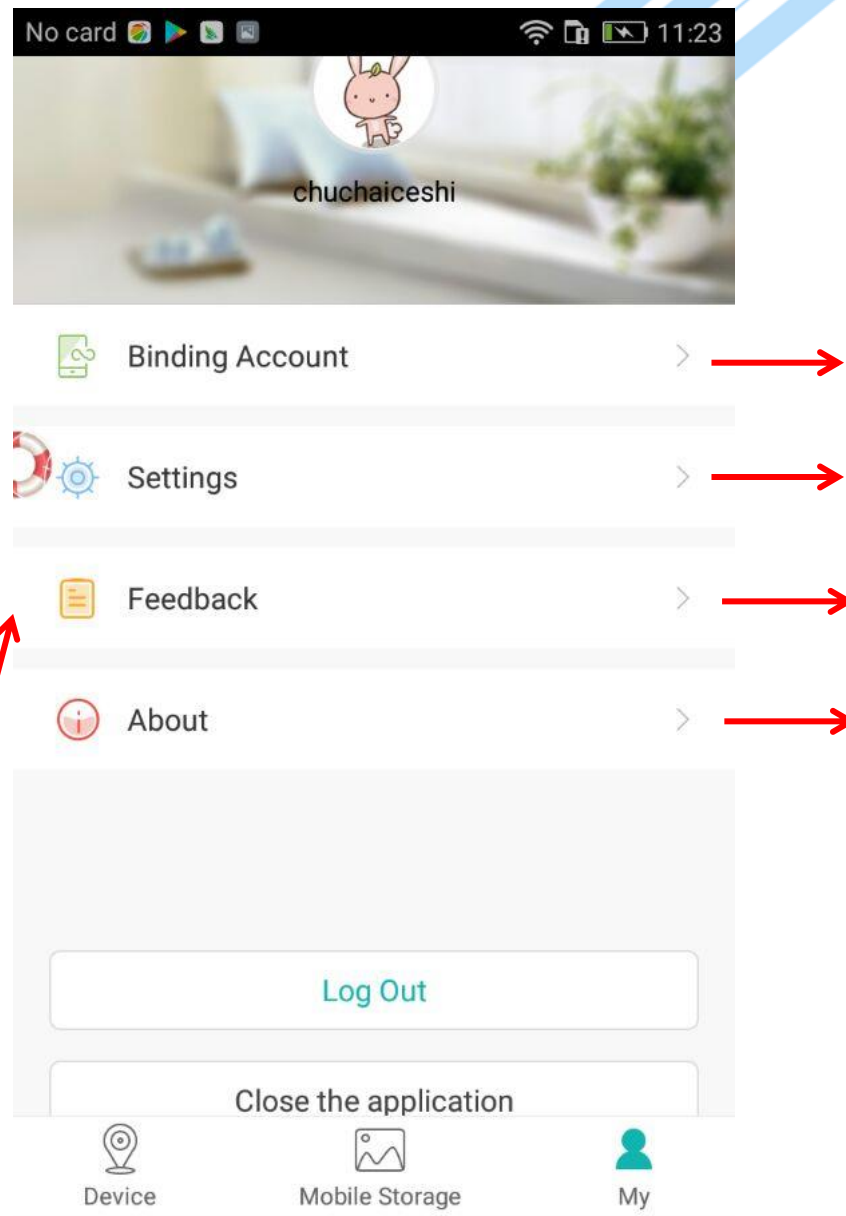

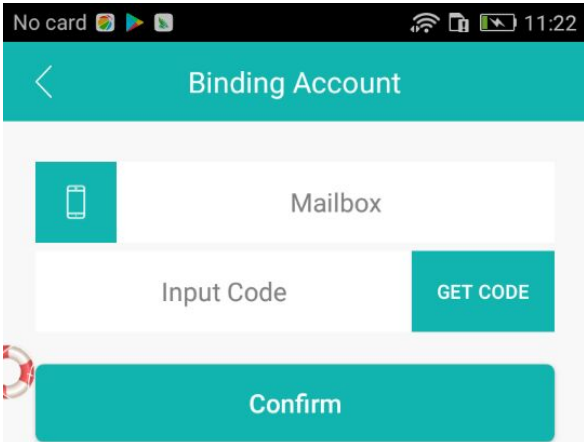

If you skip the binding mailbox when registering the username, you can choose to bind the mailbox here.

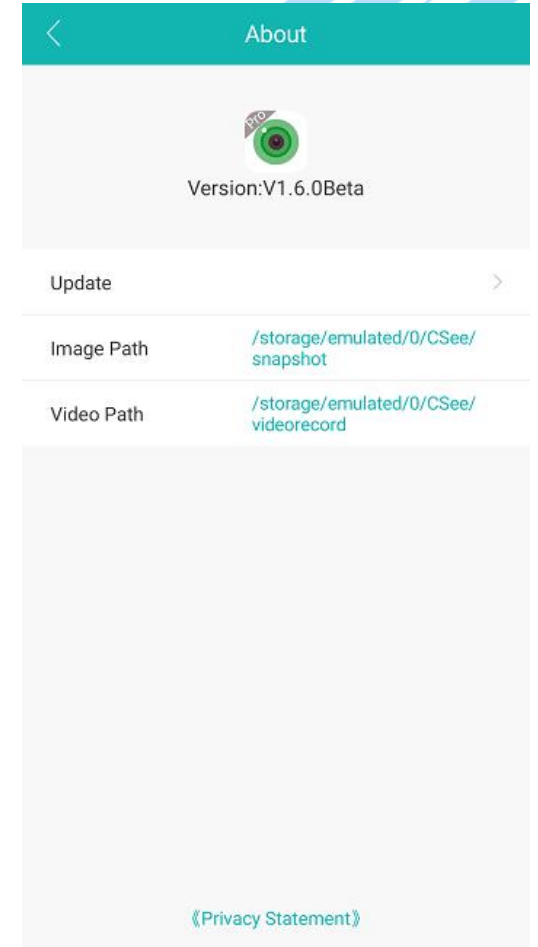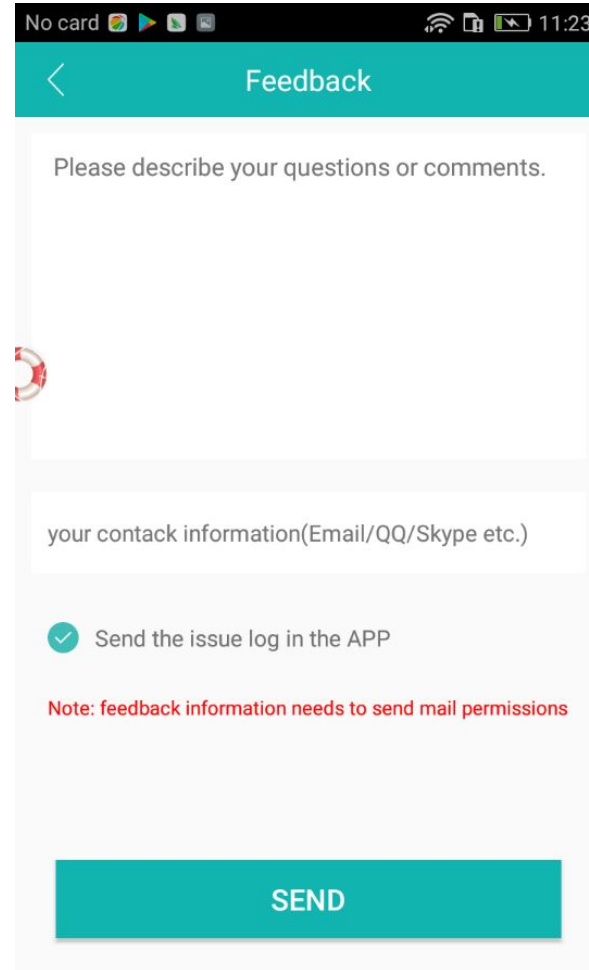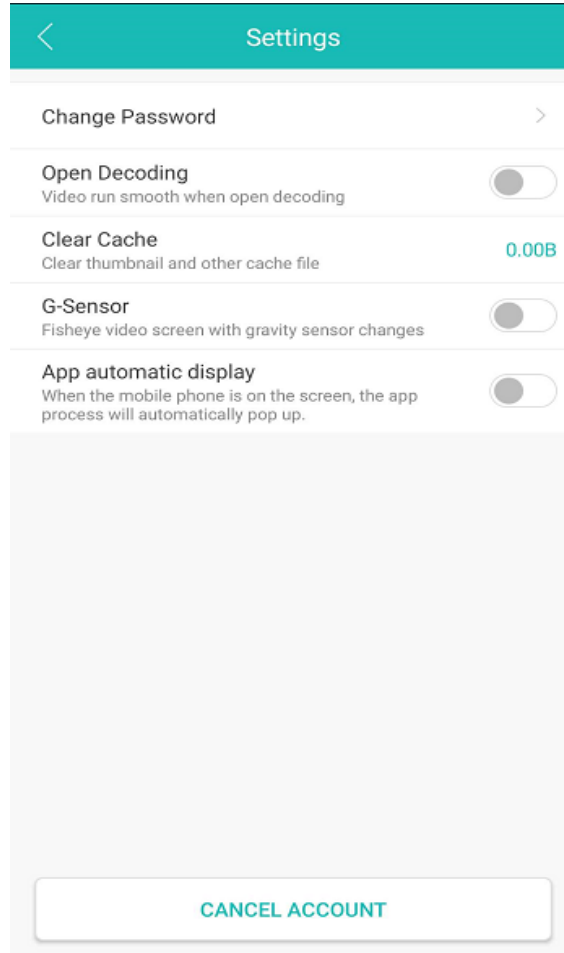

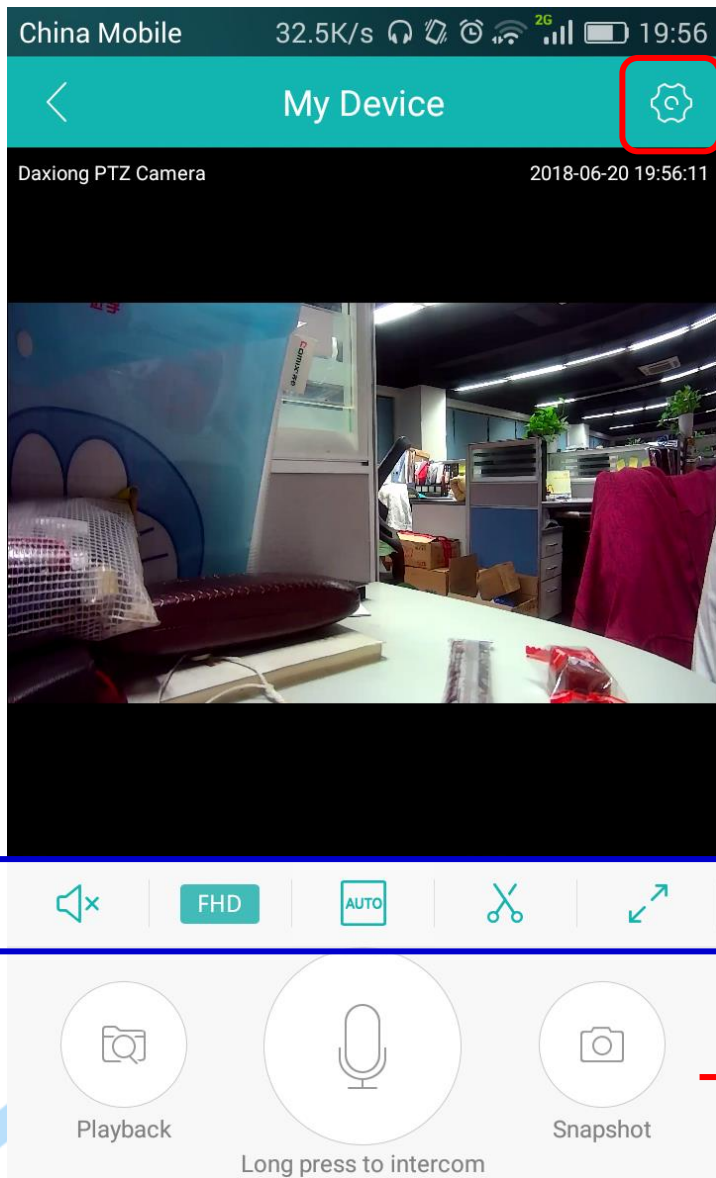




Settings

Preview interface

Here is the Audio, Definition, Screen Scale Switch (Fish-eye device does not support the four-grid mode), Video Clips, Full-Screen mode.

Playback: playback the video or view the snapshots from the TF card (detailed information please refer to “Live Video Playback”);
Long press to intercom: use the intercom function;
Snapshot: click it to snapshot.

1. Playback

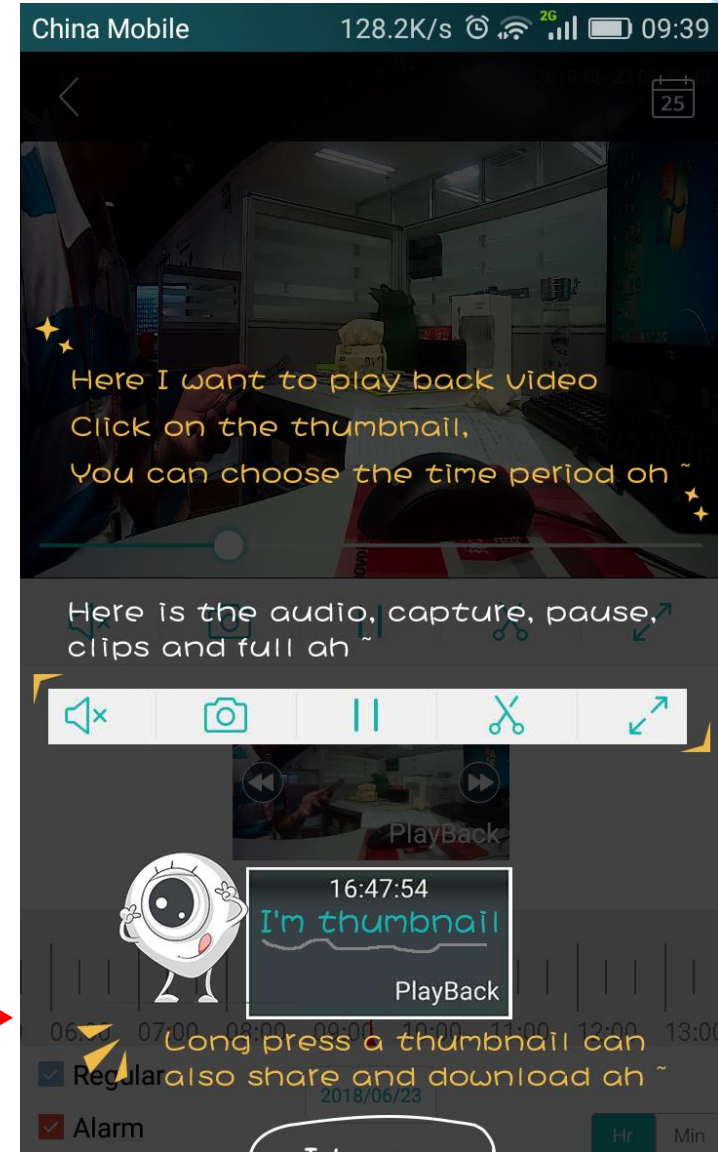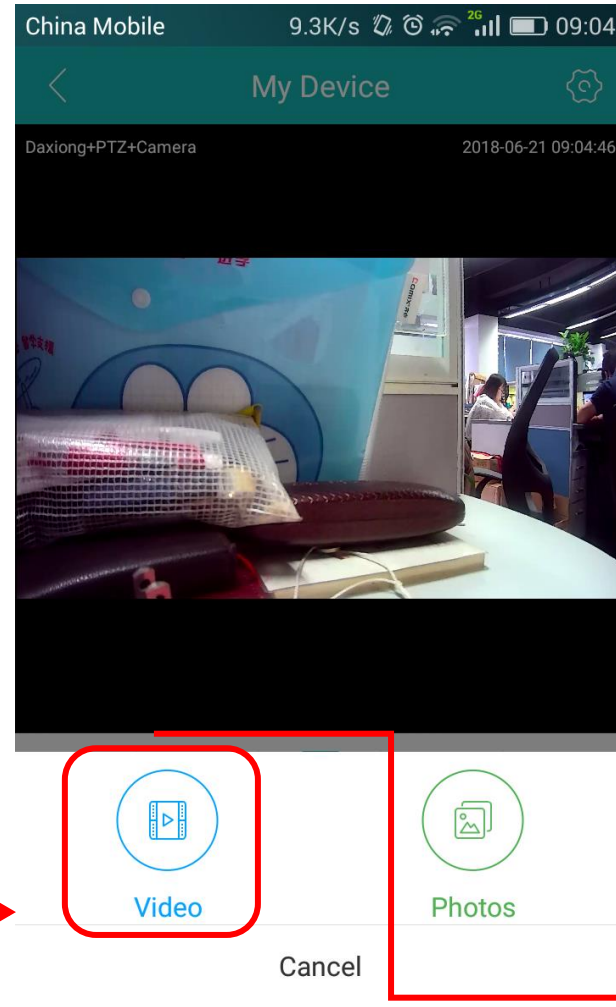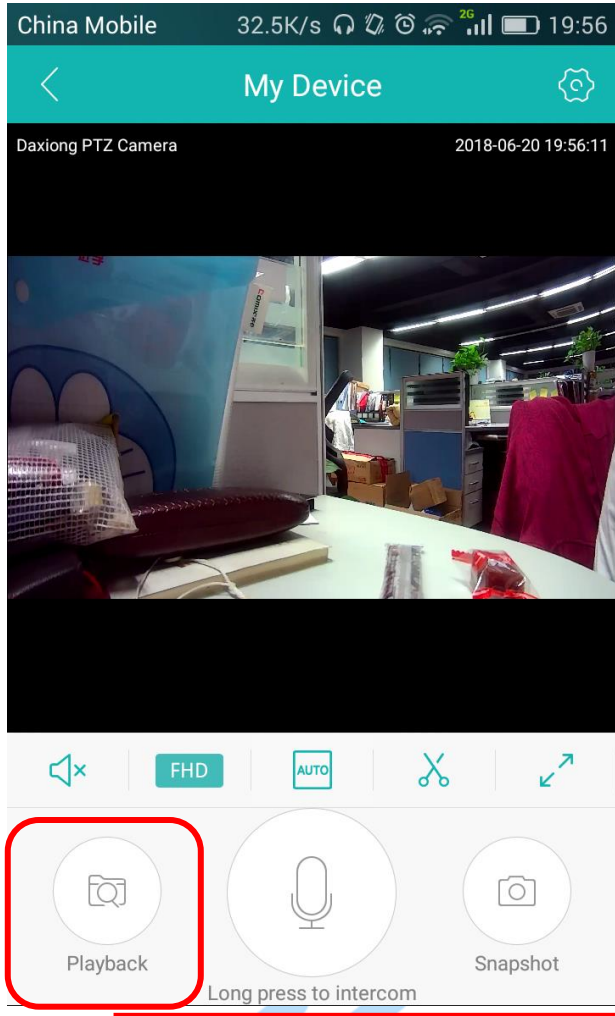

There are many sweet tips for first launching the video playback interface.

Click “Playback”, then appear the right page which you can playback or check the snapshots.

China Mobile 14.3K/s 2G 09:48

2018-06-23 09:46:27

09:44:08 09:44:34 09:46:25

PlayBack PlayBack PlayBack

01:00 01:10 01:20 01:30 01:40 01:50 02:00 02:10

Regular Alarm

2018/06/23

Hr Min

China Mobile 13.7K/s 2G 09:42

Photos

25

Empty, no picture of the day,
Please click the calendar icon
to switch the date

China Mobile 316B/s 2G 09:41

Select Date


2018/06

Mon.	Tue.	Wed.	Thur.	Fri.	Sat.	Sun.
28	29	30	31	1	2	3
4	5	6	7	8	9	10
11	12	13	14	15	16	17
18	19	20	21	22	23	24
25	26	27	28	29	30	1


No Record Have Record Select Date

Cancel

2. Settings

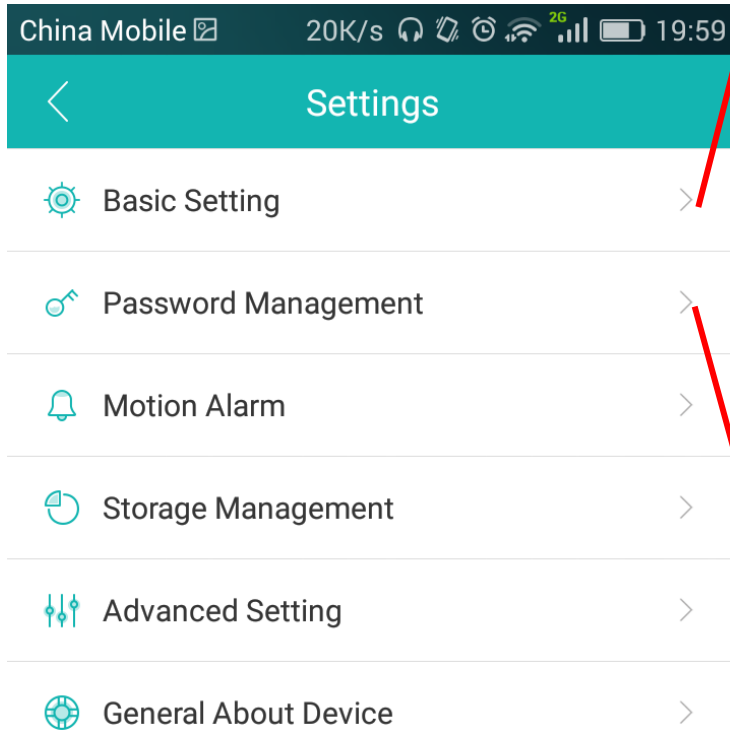


Note:
different cameras have different settings.

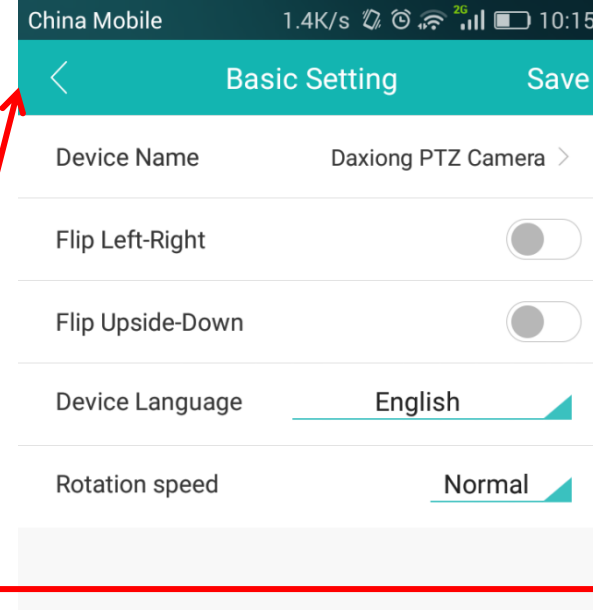


Basic Setting

You can flip the view or modify the device's name.

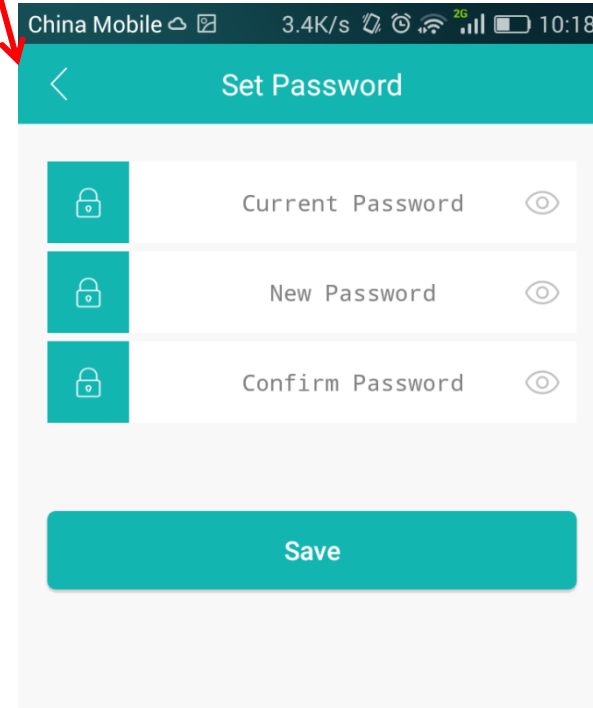


Set Password

Here you can modify the password.

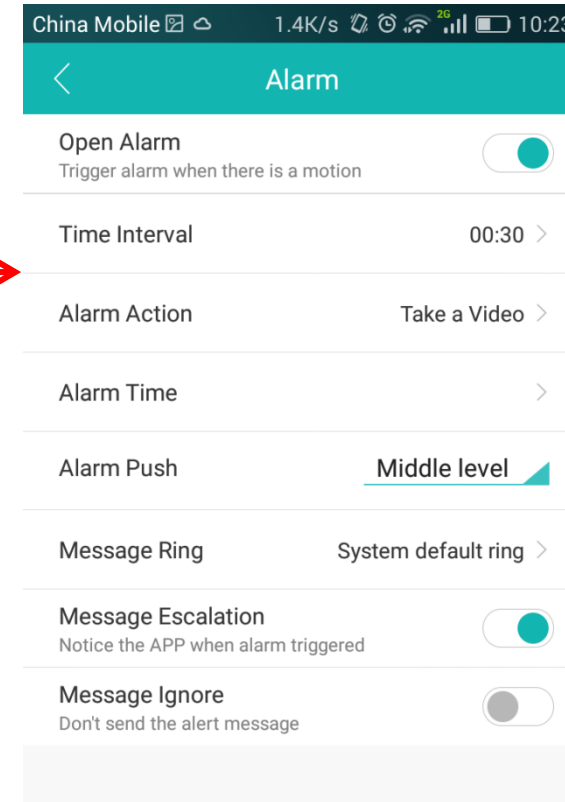


Motion Alarm

Here you can open Alarm and set the alarm type/time and choose the message ring. Then you can get alarm information like next page shows.

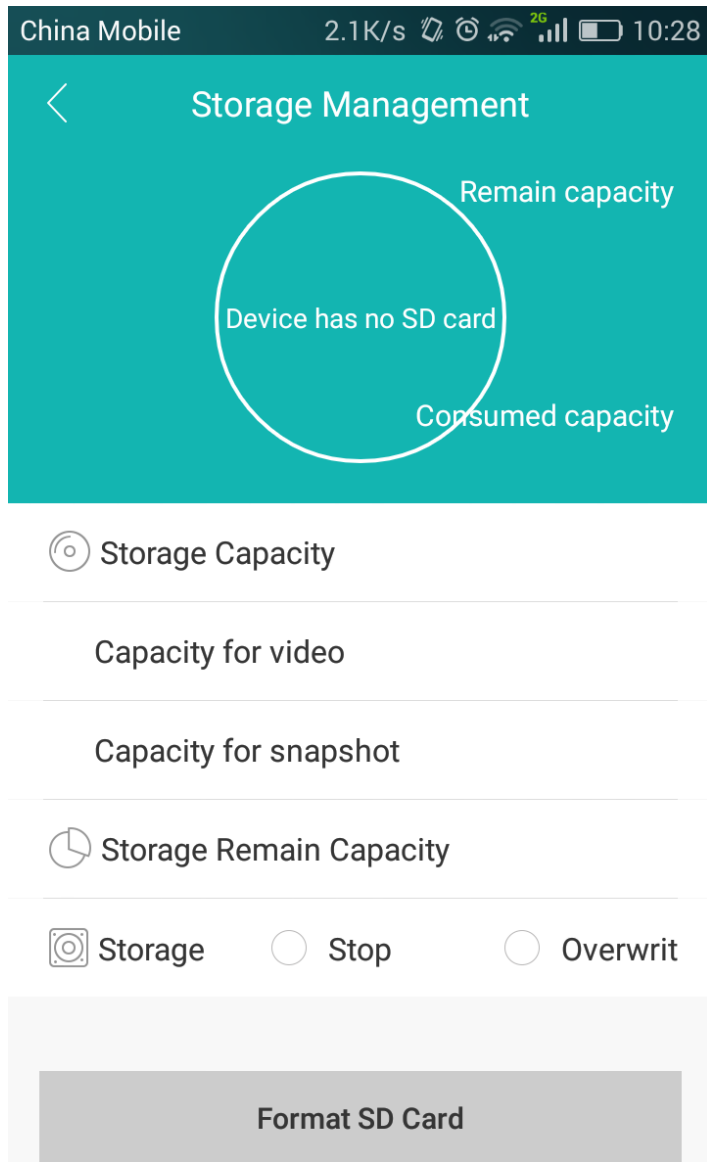

Storage Management

Here you can set the storage settings.

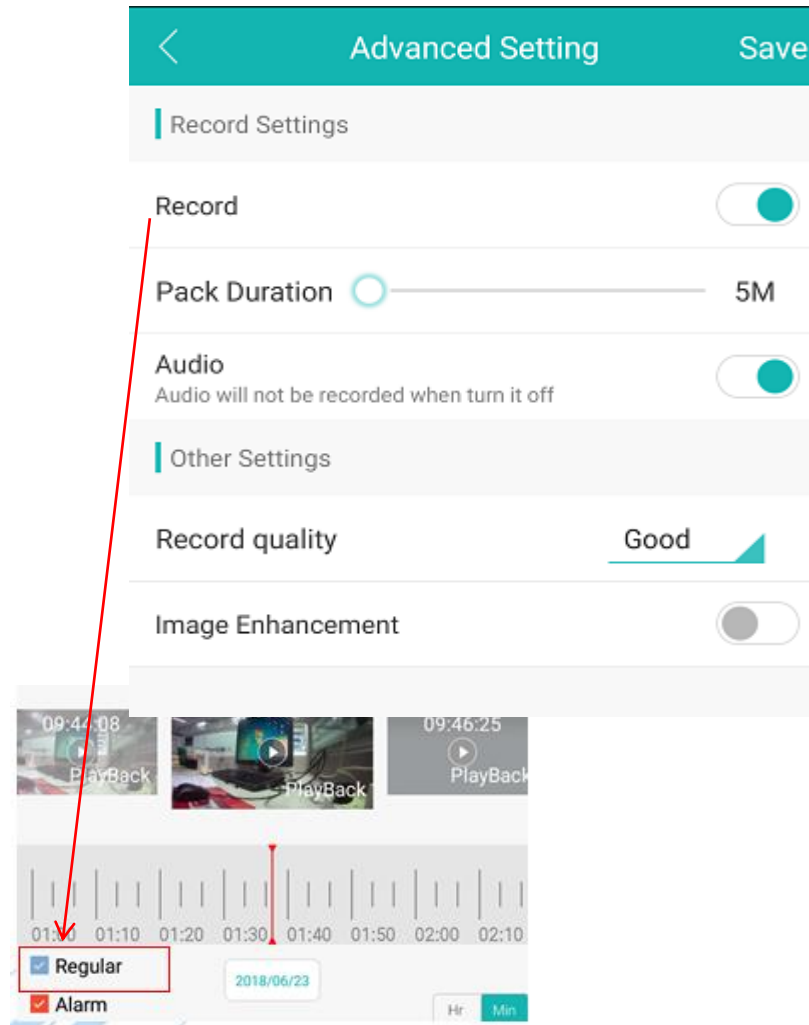

Advanced Setting


You can choose whether to enable regular recording, and set pack duration, audio, quality, etc.



General About Device

Here is the device information.


3. Alarm/Message

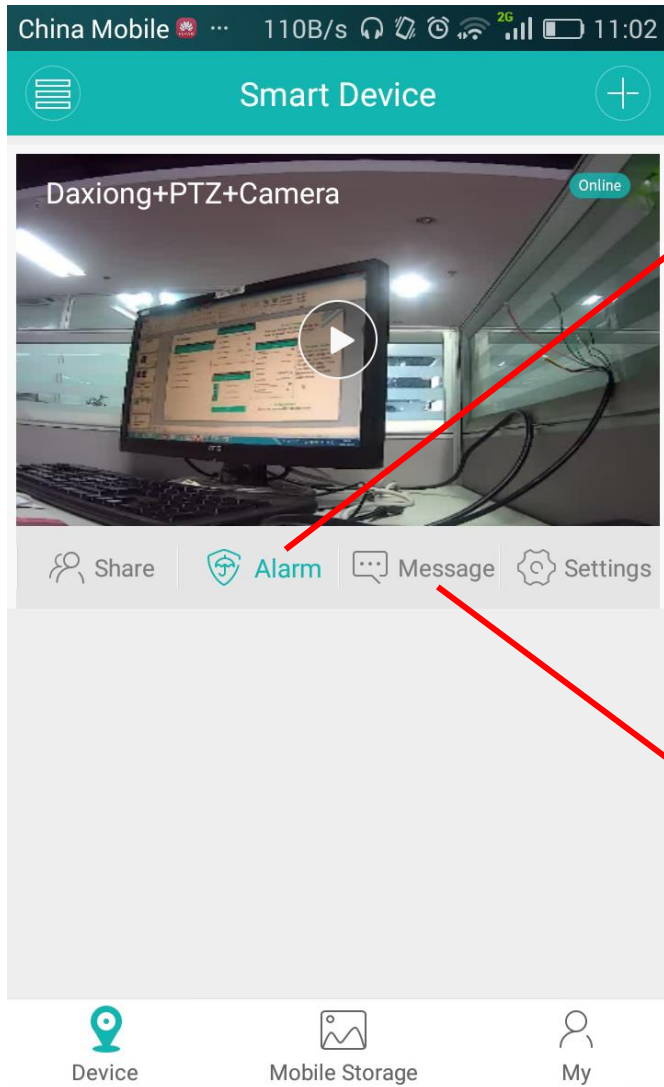

Alarm: When you set the alarm correctly, alarm message pushed to your mobile immediately like this.

NOTE : It is the same as the setting interface which you enter through the live video settings.

Message : When motion happened , you can go to Device List Interface to check the message.

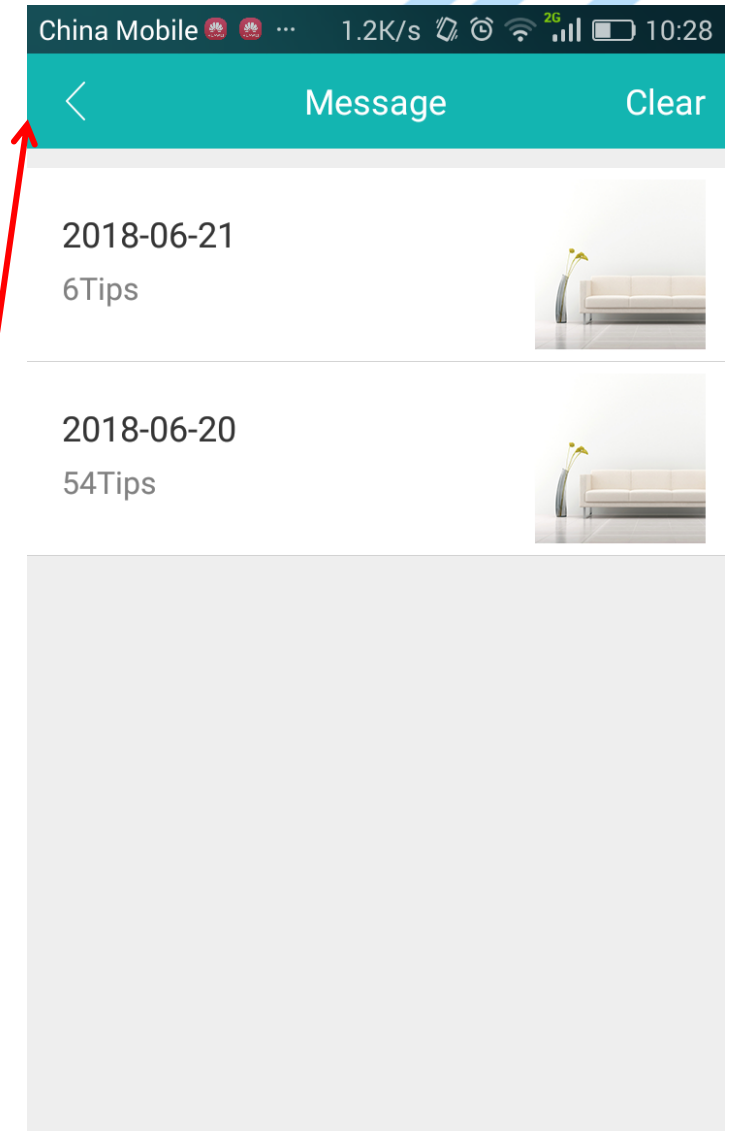



JF TECH